

Appendix A

Table (A.1): Risk category of buildings and other structures for flood, wind, snow, earthquake, and ice loads.

Use or Occupancy of Buildings and Structures	Risk Category
Buildings and other structures that represent a low risk to human life in the event of failure	I
All buildings and other structures except those listed in Risk Categories I, III, and IV	II
Buildings and other structures, the failure of which could pose a substantial risk to human life.	III
Buildings and other structures, not included in Risk Category IV, with potential to cause a substantial economic impact and/or mass disruption of day-to-day civilian life in the event of failure.	
Buildings and other structures not included in Risk Category IV (including, but not limited to, facilities that manufacture, process, handle, store, use, or dispose of such substances as hazardous fuels, hazardous chemicals, hazardous waste, or explosives) containing toxic or explosive substances where their quantity exceeds a threshold quantity established by the authority having jurisdiction and is sufficient to pose a threat to the public if released.	III
Buildings and other structures designated as essential facilities.	IV
Buildings and other structures, the failure of which could pose a substantial hazard to the community.	
Buildings and other structures (including, but not limited to, facilities that manufacture, process, handle, store, use, or dispose of such substances as hazardous fuels, hazardous chemicals, or hazardous waste) containing sufficient quantities of highly toxic substances where the quantity exceeds a threshold quantity established by the authority having jurisdiction to be dangerous to the public if released and is sufficient to pose a threat to the public if released. ^a	IV
Buildings and other structures required to maintain the functionality of other Risk Category IV structures.	

^aBuildings and other structures containing toxic, highly toxic, or explosive substances shall be eligible for classification to a lower Risk Category if it can be demonstrated to the satisfaction of the authority having jurisdiction by a hazard assessment as described in Section 1.5.2 that a release of the substances is commensurate with the risk associated with that Risk Category.


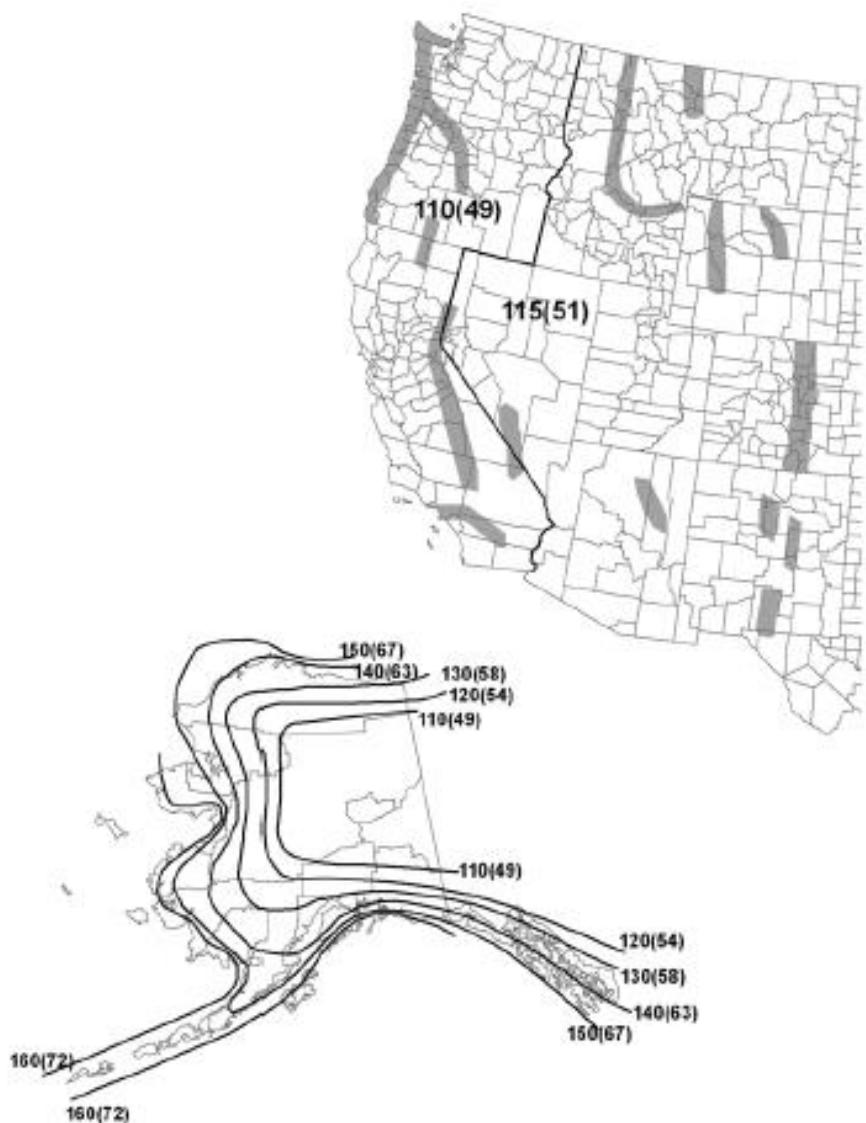


Figure (A.1): Basic wind speeds for occupancy category II buildings and other structures.

Notes:

1. Values are nominal design 3-second gust wind speeds in miles per hour (m/s) at 33 ft. (10m) above ground for Exposure C category.
2. Linear interpolation between contours is permitted.
3. Islands and coastal areas outside the last contour shall use the last wind speed contour of the coastal area.
4. Mountainous terrain, gorges, ocean promontories, and special wind regions shall be examined for unusual wind conditions.
5. Wind speeds correspond to approximately a 7% probability of exceedance in 50 years (Annual Exceedance Probability = 0.00143, MRI = 700 Years).

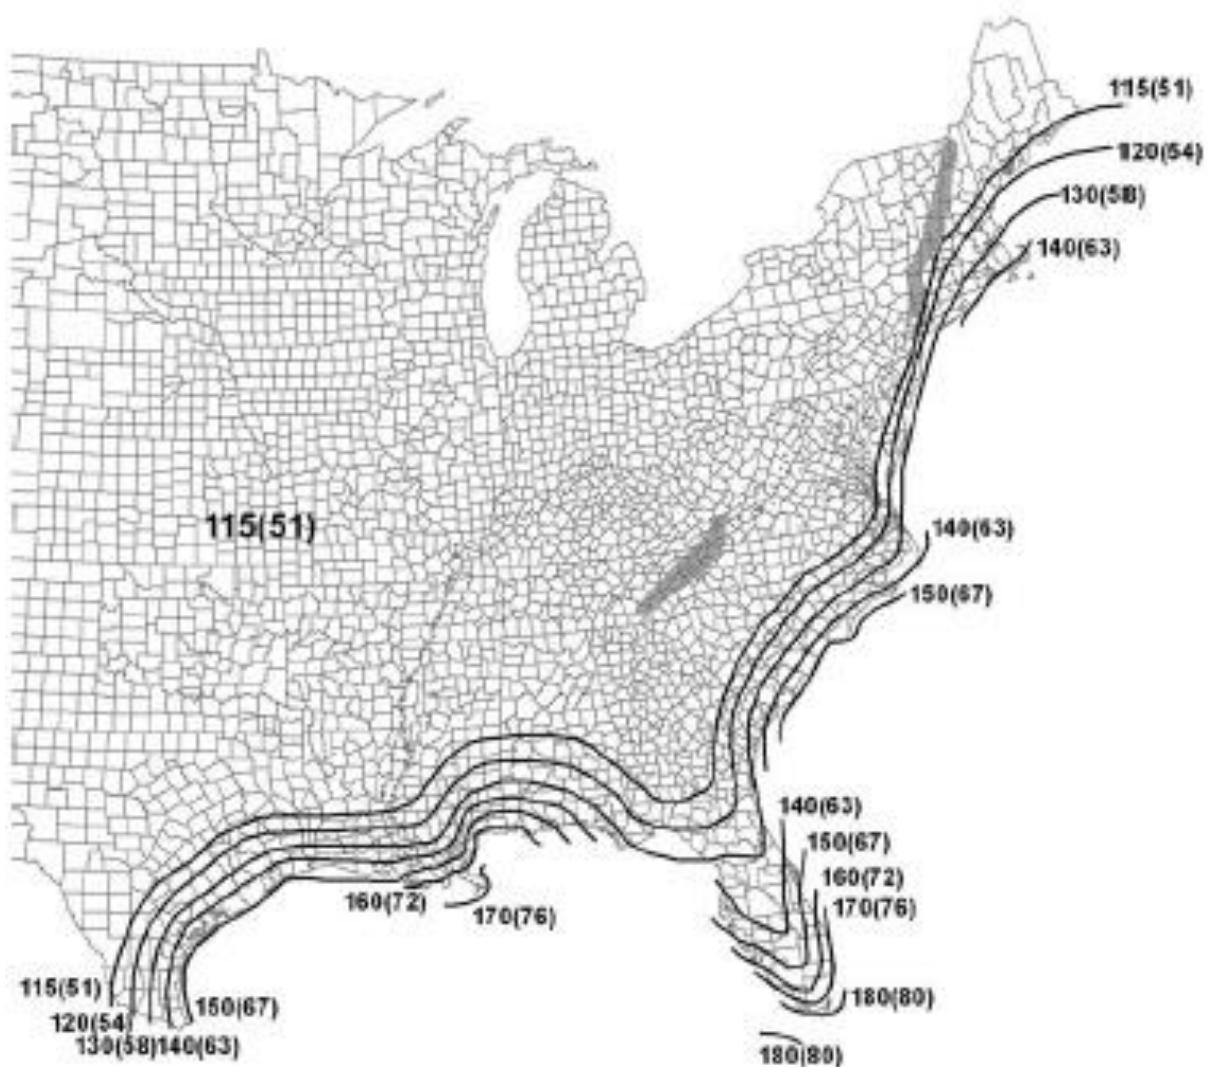


Special Wind Region

Location	Vmph	(m/s)	
Guam	195	(87)	150(67) 160(72)
Virgin Islands	165	(74)	170(76)
American Samoa	160	(72)	
Hawaii - Special Wind Region Statewide	130	(58)	Puerto Rico

Figure (A.1): (Continued).

Table (A.2): Wind directionality factor, K_d .

Structure Type	Directionality Factor K_d*
Buildings Main Wind Force Resisting System Components and Cladding	0.85 0.85
Arched Roofs	0.85
Chimneys, Tanks, and Similar Structures Square Hexagonal Round	0.90 0.95 0.95
Solid Freestanding Walls and Solid Freestanding and Attached Signs	0.85
Open Signs and Lattice Framework	0.85
Trussed Towers Triangular, square, rectangular All other cross sections	0.85 0.95

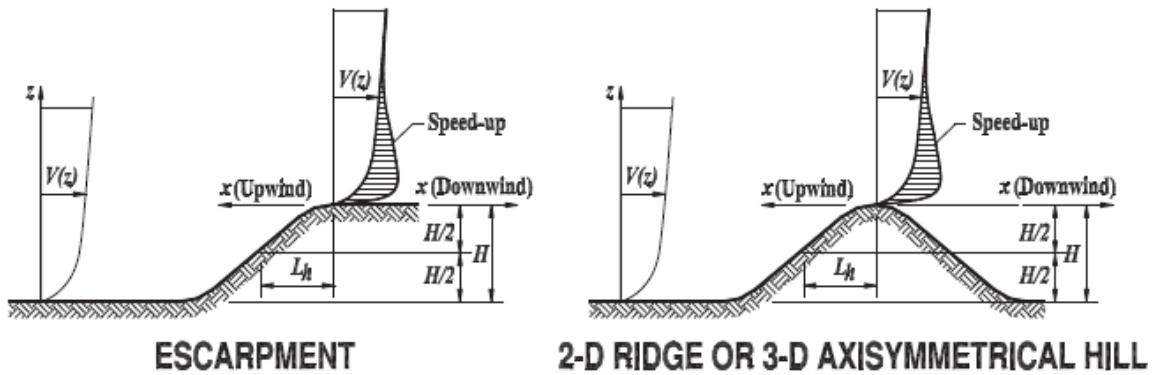

Topographic Multipliers for Exposure C										
H/L _h	K ₁ Multiplier			x/L _h	K ₂ Multiplier		z/L _h	K ₃ Multiplier		
	2-D Ridge	2-D Escarp.	3-D Axisym. Hill		2-D Escarp.	All Other Cases		2-D Ridge	2-D Escarp.	3-D Axisym. Hill
0.20	0.29	0.17	0.21	0.00	1.00	1.00	0.00	1.00	1.00	1.00
0.25	0.36	0.21	0.26	0.50	0.88	0.67	0.10	0.74	0.78	0.67
0.30	0.43	0.26	0.32	1.00	0.75	0.33	0.20	0.55	0.61	0.45
0.35	0.51	0.30	0.37	1.50	0.63	0.00	0.30	0.41	0.47	0.30
0.40	0.58	0.34	0.42	2.00	0.50	0.00	0.40	0.30	0.37	0.20
0.45	0.65	0.38	0.47	2.50	0.38	0.00	0.50	0.22	0.29	0.14
0.50	0.72	0.43	0.53	3.00	0.25	0.00	0.60	0.17	0.22	0.09
				3.50	0.13	0.00	0.70	0.12	0.17	0.06
				4.00	0.00	0.00	0.80	0.09	0.14	0.04
							0.90	0.07	0.11	0.03
							1.00	0.05	0.08	0.02
							1.50	0.01	0.02	0.00
							2.00	0.00	0.00	0.00

Figure (A.2): Topographic factor, K_{zt} .

Notes:

- For values of H/L_h , x/L_h and z/L_h other than those shown, linear interpolation is permitted.
- For $H/L_h > 0.5$, assume $H/L_h = 0.5$ for evaluating K_1 and substitute $2H$ for L_h for evaluating K_2 and K_3 .
- Multipliers are based on the assumption that wind approaches the hill or escarpment along the direction of maximum slope.
- Notation:

$H \equiv$ Height of hill or escarpment relative to the upwind terrain, in feet (meters).

$L_h \equiv$ Distance upwind of crest to where the difference in ground elevation is half the height of hill or escarpment, in feet (meters).

$K_1 \equiv$ Factor to account for shape of topographic feature and maximum speed-up effect.

$K_2 \equiv$ Factor to account for reduction in speed-up with distance upwind or downwind of crest.

$K_3 \equiv$ Factor to account for reduction in speed-up with height above local terrain.

$x \equiv$ Distance (upwind or downwind) from the crest to the building site, in feet (meters).

$z \equiv$ Height above ground surface at building site, in feet (meters).

$\mu \equiv$ Horizontal attenuation factor.

$\gamma \equiv$ Height attenuation factor.

Equations:

$$K_{zt} = (1 + K_1 K_2 K_3)^2$$

K_1 determined from table below

$$K_2 = \left(1 - \frac{|x|}{\mu L_h}\right)$$

$$K_3 = e^{-\gamma z/L_h}$$

Parameters for Speed-Up Over Hills and Escarpments							
Hill Shape	K ₁ /(H/L _h)			γ	μ		
	Exposure				Upwind of Crest	Downwind of Crest	
	B	C	D				
2-dimensional ridges (or valleys with negative H in K ₁ /(H/L _h))	1.30	1.45	1.55	3	1.5	1.5	
2-dimensional escarpments	0.75	0.85	0.95	2.5	1.5	4	
3-dimensional axisym. hill	0.95	1.05	1.15	4	1.5	1.5	

Figure (A.2): (continued): Topographic factor K_{zt} .

Table (A.3): Terrain exposure constant.

Exposure	a	z_t (ft)	\hat{a}	\hat{b}	\bar{a}	\bar{b}	c	ℓ (ft)	\bar{e}	z_{min} (ft)*
B	7.0	1200	1/7	0.84	1/4.0	0.45	0.30	320	1/3.0	30
C	9.5	900	1/9.5	1.00	1/6.5	0.65	0.20	500	1/5.0	15
D	11.5	700	1/11.5	1.07	1/9.0	0.80	0.15	650	1/8.0	7

* z_{min} = minimum height used to ensure that the equivalent height \bar{Z} is greater of $0.6h$ or z_{min} .
For buildings with $h \leq z_{min}$, \bar{Z} shall be taken as z_{min} .

In metric

Exposure	a	z_t (m)	\hat{a}	\hat{b}	\bar{a}	\bar{b}	c	ℓ (m)	\bar{e}	z_{min} (m)*
B	7.0	365.76	1/7	0.84	1/4.0	0.45	0.30	97.54	1/3.0	9.14
C	9.5	274.32	1/9.5	1.00	1/6.5	0.65	0.20	152.4	1/5.0	4.57
D	11.5	213.36	1/11.5	1.07	1/9.0	0.80	0.15	198.12	1/8.0	2.13

* z_{min} = minimum height used to ensure that the equivalent height \bar{Z} is greater of $0.6h$ or z_{min} .
For buildings with $h \leq z_{min}$, \bar{Z} shall be taken as z_{min} .

Table (A.4): Internal pressure coefficient, (GC_{pi}).

Enclosure Classification	(GC_{pi})
Open Buildings	0.00
Partially Enclosed Buildings	+0.55 -0.55
Enclosed Buildings	+0.18 -0.18

Notes:

1. Plus and minus signs signify pressures acting toward and away from the internal surfaces, respectively.
2. Values of (GC_{pi}) shall be used with q_z or q_h as specified.
3. Two cases shall be considered to determine the critical load requirements for the appropriate condition:
 - i. A positive value of (GC_{pi}) applied to all internal surfaces.
 - ii. A negative value of (GC_{pi}) applied to all internal surfaces.

Table (A.5): Velocity pressure exposure coefficient K_z .

Height above ground level, z	Exposure			
	B	C	D	
ft	(m)			
0-15	(0-4.6)	0.57	0.85	1.03
20	(6.1)	0.62	0.90	1.08
25	(7.6)	0.66	0.94	1.12
30	(9.1)	0.70	0.98	1.16
40	(12.2)	0.76	1.04	1.22
50	(15.2)	0.81	1.09	1.27
60	(18)	0.85	1.13	1.31
70	(21.3)	0.89	1.17	1.34
80	(24.4)	0.93	1.21	1.38
90	(27.4)	0.96	1.24	1.40
100	(30.5)	0.99	1.26	1.43
120	(36.6)	1.04	1.31	1.48
140	(42.7)	1.09	1.36	1.52
160	(48.8)	1.13	1.39	1.55
180	(54.9)	1.17	1.43	1.58
200	(61.0)	1.20	1.46	1.61
250	(76.2)	1.28	1.53	1.68
300	(91.4)	1.35	1.59	1.73
350	(106.7)	1.41	1.64	1.78
400	(121.9)	1.47	1.69	1.82
450	(137.2)	1.52	1.73	1.86
500	(152.4)	1.56	1.77	1.89


Note:

1. The velocity pressure exposer coefficient K_z may be determined from the following formula:


$$K_z = 2.01 \left(\frac{z}{z_g} \right)^{2/\alpha} \quad \text{For } 15 \text{ ft.} \leq z \leq z_g$$

$$K_z = 2.01 \left(\frac{15}{z_g} \right)^{2/\alpha} \quad \text{For } 15 \leq z$$


2. α and z_g are tabulated in Table A.3.
3. Linear interpolation for intermediate values of height z is acceptable.
4. Exposer categories are defined in chapter two.

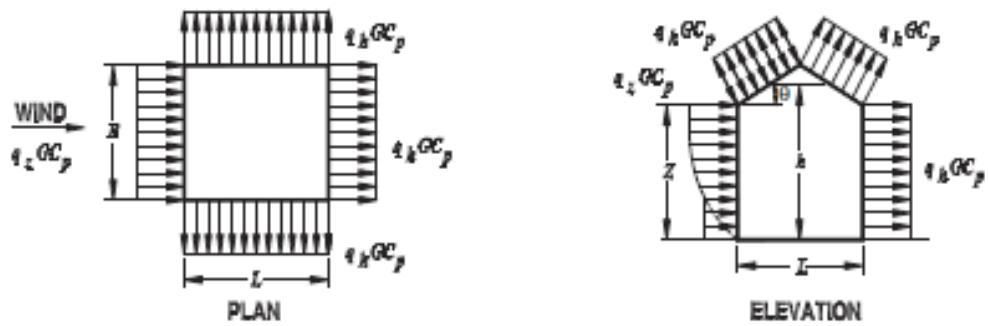

GABLE, HIP ROOF

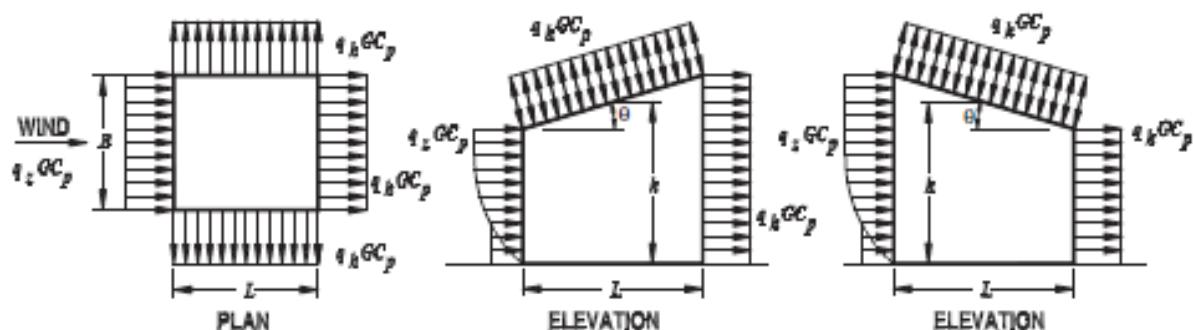

MONOSLOPE ROOF (NOTE 4)

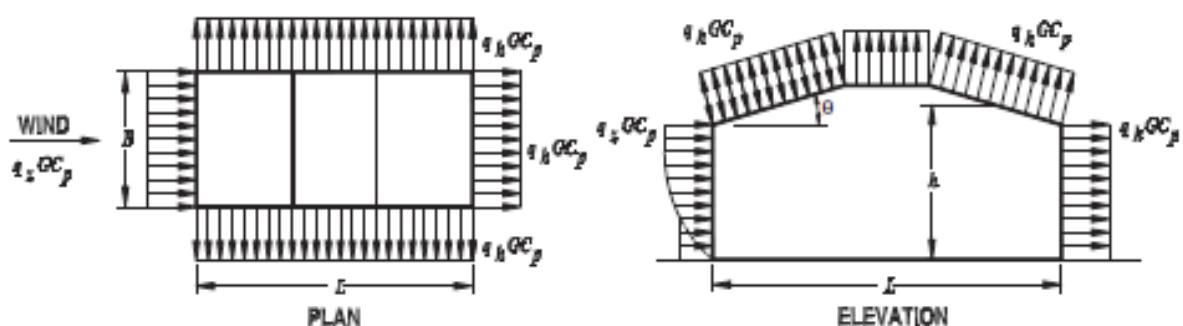

MANSARD ROOF (NOTE 8)

Figure (A.3): External pressure coefficients, C_p .

Wall Pressure Coefficients, C_p			
Surface	L/B	C_p	Use With
Windward Wall	All values	0.8	q_z
Leeward Wall	0-1	-0.5	q_h
	2	-0.3	
	≥ 4	-0.2	
Side Wall	All values	-0.7	q_h

1. Plus and minus signs signify pressures acting toward and away from the surfaces, respectively.
2. Linear interpolation is permitted for values of L/B , h/L and θ other than shown. Interpolation shall only be carried out between values of the same sign. Where no value of the same sign is given, assume 0.0 for interpolation purposes.
3. Where two values of C_p are listed, this indicates that the windward roof slope is subjected to either positive or negative pressures and the roof structure shall be designed for both conditions. Interpolation for intermediate ratios of h/L in this case shall only be carried out between C_p values of like sign.
4. For mono slope roofs, entire roof surface is either a windward or leeward surface.
5. Notation:
 - B : Horizontal dimension of building, in feet (meter), measured normal to wind direction.
 - L : Horizontal dimension of building, in feet (meter), measured parallel to wind direction.
 - h : Mean roof height in feet (meters), except that eave height shall be used for $\theta \leq 10$ degrees.
 - z : Height above ground, in feet (meters).
 - q_z, q_h : Velocity pressure, in pounds per square foot (N/m^2), evaluated at respective height.
 - θ : Angle of plane of roof from horizontal, in degrees.
6. For mansard roofs, the top horizontal surface and leeward inclined surface shall be treated as leeward surfaces from the table.
7. For roof slopes greater than 80° , use $C_p = 0.8$

Figure (A.3): (continued) External pressure coefficients, C_p .

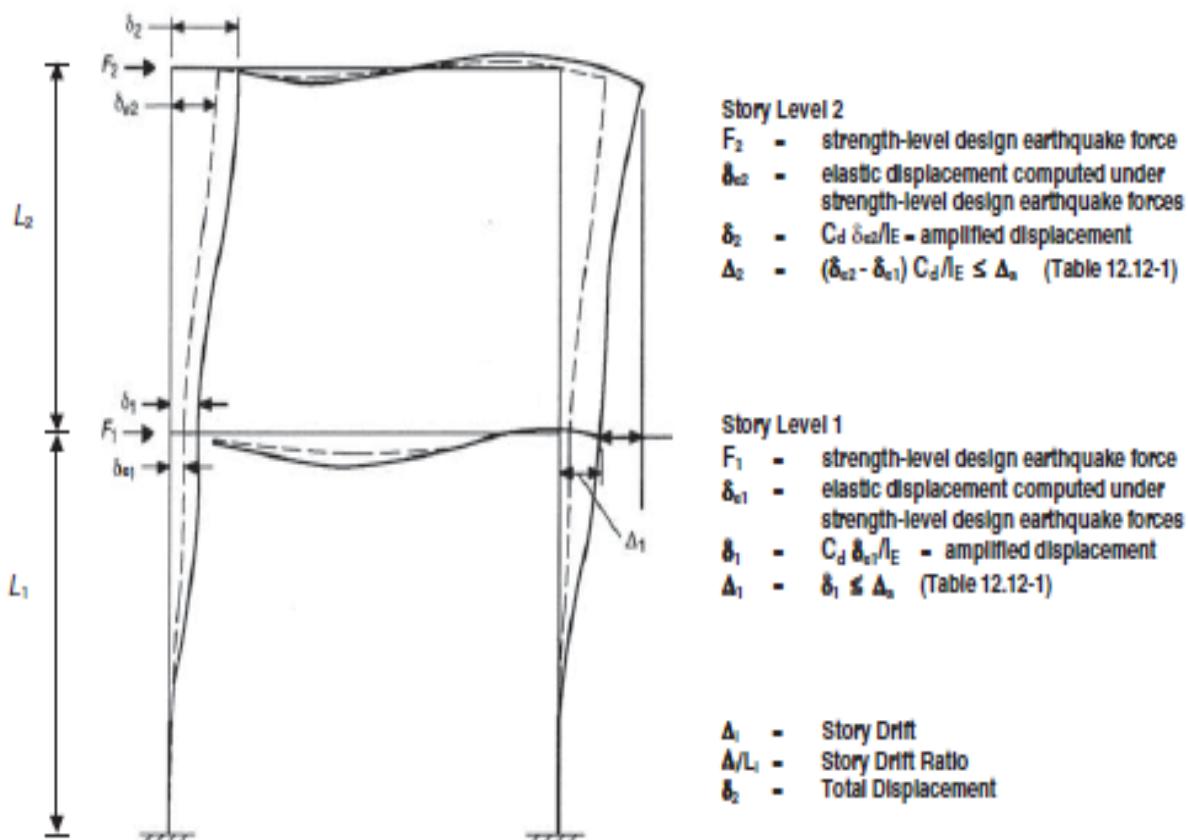


Figure (A.4): Story drift determination.

Table (A.6): Allowable Story Drift, Δ_a ^{a,b}.

Structure	Risk Category		
	I or II	III	IV
Structures, other than masonry shear wall structures, 4 stories or less above the base as defined in Section 11.2, with interior walls, partitions, ceilings, and exterior wall systems that have been designed to accommodate the story drifts.	$0.025h_{ix}^c$	$0.020h_{ix}$	$0.015h_{ix}$
Masonry cantilever shear wall structures ^d	$0.010h_{ix}$	$0.010h_{ix}$	$0.010h_{ix}$
Other masonry shear wall structures	$0.007h_{ix}$	$0.007h_{ix}$	$0.007h_{ix}$
All other structures	$0.020h_{ix}$	$0.015h_{ix}$	$0.010h_{ix}$

^c h_{ix} is the story height below Level x.

^dFor seismic force-resisting systems comprised solely of moment frames in Seismic Design Categories D, E, and F, the allowable story drift shall comply with the requirements of Section 12.12.1.1.

There shall be no drift limit for single-story structures with interior walls, partitions, ceilings, and exterior wall systems that have been designed to accommodate the story drifts. The structure separation requirement of Section 12.12.3 is not waived.

^aStructures in which the basic structural system consists of masonry shear walls designed as vertical elements cantilevered from their base or foundation support which are so constructed that moment transfer between shear walls (coupling) is negligible.




Table 1-1
W Shapes
Dimensions

Shape	Area <i>A</i>	Depth, <i>d</i>	Web Thickness, <i>t_w</i>	Width, <i>b_f</i>	Flange Thickness, <i>t_f</i>	Distance <i>k</i>	Distance <i>k_{des}</i>	Workable Gauge
W44x335 ^c	98.5	44.0	1.03	1 1/2	15.9	1 7/16	2 5/16	1 5/16
×290 ^c	85.4	43.6	1 3/8	1.865	7/8	15.8	1 9/16	2.36
×262 ^c	76.9	43.3	43 1/8	0.785	13 1/16	7/8	15 3/4	1 1/16
×230 ^{c,v}	67.7	42.9	42 5/8	0.710	11 1/16	7/8	15 8/9	1 1/8
W40x693 ^c	174	43.0	43	1.79	13 9/16	16 7/16	3 1/4	4 1/2
×503 ^c	148	42.1	42	1 1/4	15 1/8	16 4/16	2 7/8	3 1/4
×431 ^c	127	41.3	41 1/4	1 9/16	11 1/16	16 2/16	2 3/8	3 1/8
×397 ^c	117	41.0	41	1 1/4	9/8	16 1/16	2 2/8	3 3/8
×372 ^c	109	40.6	40 9/8	1 1/16	13 9/16	16 1/16	2 1/8	3 1/8
×362 ^{b,h}	107	40.6	40 9/8	1 1/16	9/8	16.0	2.01	2
×324	95.3	40.2	40 9/8	1.00	1 1/2	15.9	1 5/16	1.99
×297 ^c	87.4	39.8	39 7/8	0.930	15 1/16	1 1/2	15.8	1 5/16
×277 ^c	81.4	39.7	39 3/4	0.830	13 1/16	7/8	15 1/8	1 9/16
×249 ^c	73.3	39.4	39 3/4	0.750	3/4	15.8	1 4/16	1 1/16
×215 ^c	63.4	39.0	39	0.650	5/8	15 1/8	1 2/16	2 4/16
×198 ^c	58.5	38.7	38 3/8	0.650	5/8	15 8/16	1 1/16	2 2/8
W40x392 ^c	115	41.6	41 5/8	1.42	17 1/16	3/4	12 4/16	2 5/2
×331 ^c	97.5	40.8	40 3/4	1.22	1 1/8	5/8	12 2/16	2 1/2
×327 ^c	96.0	40.8	40 3/4	1.18	19 1/16	5/8	12.1	2 1/8
×294	86.3	40.4	40 3/8	1.06	17 1/16	9/16	12.0	1.93
×278	82.0	40.2	40 9/8	1.03	1 1/2	1.81	1 13/16	2.99
×264	77.6	40.0	40	0.960	15 1/16	7/2	11.9	1 11/16
×235 ^c	68.0	39.7	39 3/4	0.830	13 1/16	7/6	11.9	1 5/16
×211 ^c	62.0	39.4	39 3/8	0.750	3/4	11.8	1 4/16	2.76
×183 ^c	53.3	39.0	39	0.650	5/8	11.8	1 13/16	2 3/8
×167 ^c	49.2	38.6	38 3/8	0.650	5/8	11.8	1 11/16	2 1/2
×149 ^{c,v}	43.8	38.2	38 1/4	0.630	5/8	11.8	1 13/16	2 1/2

^c Shape is slender for compression with $F_c = 50$ ksi.
^b Flange thickness greater than 2 in. Special requirements may apply per ASCE Specification Section A3.1c.
^v Shape does not meet the h_f limit for shear in Specification Section G2.1a with $F_y = 50$ ksi.

T											
W Shapes Properties											
Nominal Wt.	$\frac{b_f}{2t_f}$	$\frac{h}{b_f}$	Axis X-X			Axis Y-Y			Torsional Properties		
			<i>I</i>	<i>S</i>	<i>r</i>	<i>I</i>	<i>S</i>	<i>r</i>	<i>J</i>	<i>C_w</i>	<i>in.⁴</i>
335	4.50	38.0	31100	1410	17.8	1620	1200	150	349	236	4.24
290	5.02	45.0	27000	1240	17.8	1410	1040	132	349	205	4.21
262	5.57	49.6	24100	1110	17.7	1270	923	117	347	182	4.17
230	6.45	54.8	20800	971	17.5	1100	796	101	343	157	4.13
593	5.58	19.1	50400	2340	17.0	2760	2520	302	380	481	4.63
503	5.98	22.3	41600	1980	16.8	2310	2040	249	372	394	4.45
431	3.44	25.5	34800	1690	16.6	1960	1630	208	365	328	4.41
397	3.66	28.0	32000	1560	16.6	1800	1540	191	364	300	4.37
372	3.93	26.5	28600	1460	16.5	1800	1420	177	355	277	4.34
362	3.98	30.5	28900	1420	16.5	1640	1380	173	360	270	4.33
324	4.40	34.2	25600	1280	16.4	1460	1220	153	358	239	4.28
297	4.80	36.8	23200	1170	16.3	1330	1090	138	354	215	4.23
277	5.63	41.2	21900	1100	16.4	1250	1040	132	358	204	4.25
249	5.55	45.6	19600	993	16.3	1120	926	118	355	182	4.21
215	6.45	52.6	16700	859	16.2	964	796	101	354	156	4.18
199	7.39	52.6	14900	770	16.0	869	695	88.2	345	137	4.12
392	4.45	24.1	29800	1440	16.1	1710	803	130	264	212	3.30
331	2.86	28.0	24700	1210	15.9	1430	644	106	257	172	3.21
327	2.85	29.0	24500	1200	16.0	1410	640	105	258	170	3.21
294	3.11	32.2	27900	1080	15.9	1270	562	93.5	255	150	3.16
278	3.31	33.3	26500	1020	15.8	1190	521	87.1	252	140	3.13
264	3.45	35.6	19400	971	15.8	1130	493	82.6	252	132	3.12
235	3.77	41.2	17400	875	15.9	1010	444	74.6	254	118	3.11
211	4.17	45.6	15800	786	15.8	906	390	66.1	251	105	3.07
183	4.92	52.6	13200	774	15.7	774	331	56.0	249	88.3	3.04
167	5.76	52.6	11600	600	15.3	693	283	47.9	24.0	76.0	2.98
149	7.11	54.3	9800	513	15.0	598	229	38.8	22.9	62.2	2.89

Table (A.7): Dimensions and properties for the used structural steel.



Table 1-1 (continued)
W Shapes
Dimensions

Shape	Area, <i>A</i>	Depth, <i>d</i>	Web			Flange			Distance			Axis X-X			Axis Y-Y															
			Thickness, <i>t_w</i>	<i>t_w</i>	<i>b_w</i>	Width, <i>b_f</i>	<i>t_f</i>	Thickness, <i>k</i>	<i>k_{des}</i>	<i>k_t</i>	<i>T</i>	Workable Gauge	<i>I</i>	<i>S</i>	<i>r</i>	<i>Z</i>	<i>I</i>	<i>S</i>	<i>r</i>	<i>Z</i>										
W36×300 ^h	236	42.6	42 $\frac{1}{2}$	2.38	2 $\frac{1}{8}$	13 $\frac{1}{16}$	18.0	18	4 $\frac{9}{16}$	5.24	5 $\frac{5}{16}$	2 $\frac{3}{8}$	800	210	13.5	64700	3040	16.6	3550	4200	467	4.22	743	5.14	38.3	1061	154000			
W36×322 ^h	192	41.1	41.1	1.97	2	1	17.6	17 $\frac{1}{8}$	3.54	4 $\frac{1}{16}$	4.49	4 $\frac{1}{16}$	2 $\frac{3}{8}$	652	248	16.3	50600	2460	16.2	2910	3230	367	4.10	581	4.96	37.5	593	113000		
W36×329 ^h	156	39.8	39.9	1.61	1 $\frac{5}{8}$	13 $\frac{1}{16}$	17.2	2.91	2 $\frac{5}{16}$	3.86	3 $\frac{3}{16}$	2 $\frac{3}{8}$	529	236	19.9	36000	1980	16.0	2330	2490	289	4.00	454	4.86	36.9	327	846000			
W36×348 ^h	143	39.3	39.3	1.50	1 $\frac{1}{2}$	17 $\frac{1}{16}$	17.1	1.7	2 $\frac{1}{16}$	3.63	4	1 $\frac{15}{16}$	2 $\frac{3}{8}$	487	319	21.4	36000	1830	15.8	2130	2250	263	3.96	412	4.74	36.7	258	754000		
W36×344 ^h	130	38.9	38 $\frac{1}{2}$	1.36	1 $\frac{3}{8}$	11 $\frac{1}{16}$	17.0	1.7	2.44	2 $\frac{1}{16}$	3.39	3 $\frac{3}{16}$	1 $\frac{7}{8}$	441	348	23.6	32100	1650	15.7	1910	1980	235	3.92	368	4.69	36.4	194	661000		
W36×355 ^h	116	38.4	38 $\frac{1}{2}$	1.22	1 $\frac{1}{4}$	9 $\frac{1}{16}$	16.8	16 $\frac{1}{8}$	16 $\frac{1}{8}$	2.20	2 $\frac{1}{16}$	3 $\frac{1}{16}$	1 $\frac{13}{16}$	31 $\frac{3}{8}$	7 $\frac{1}{2}$	395	333	26.3	28500	1480	15.7	1710	1750	208	3.88	325	4.61	36.2	142	575000
W36×361 ^h	106	38.0	38	1.12	1 $\frac{1}{4}$	9 $\frac{1}{16}$	16.7	16.7	2.01	2	2.96	3 $\frac{1}{16}$	1 $\frac{3}{4}$	361	416	28.6	25700	1350	15.6	1550	1570	188	3.85	233	4.58	36.0	108	589000		
W36×370 ^h	97.0	37.7	37 $\frac{1}{2}$	1.02	1	9 $\frac{1}{16}$	16.6	16 $\frac{1}{8}$	1.85	1 $\frac{7}{16}$	2.80	3 $\frac{1}{16}$	1 $\frac{3}{4}$	330	449	31.4	23300	1240	15.5	1410	1420	171	3.83	265	4.53	35.8	84.3	458000		
W36×388 ^h	88.8	37.3	37 $\frac{1}{2}$	0.945	1 $\frac{5}{16}$	15 $\frac{1}{16}$	16.6	16 $\frac{1}{8}$	1.68	1 $\frac{11}{16}$	2.63	3	1 $\frac{11}{16}$	302	436	33.9	21100	1130	15.4	1280	1300	156	3.82	241	4.53	35.7	64.3	412000		
W36×382 ^c	82.9	37.1	37 $\frac{1}{2}$	0.885	1 $\frac{7}{8}$	7 $\frac{1}{16}$	16.6	16 $\frac{1}{8}$	1.57	1 $\frac{9}{16}$	2.52	2 $\frac{1}{8}$	1 $\frac{5}{8}$	262	529	36.2	19600	1050	15.4	1190	1200	144	4.50	35.5	52.7	378000				
W36×362 ^c	77.0	36.9	36 $\frac{1}{2}$	0.840	1 $\frac{9}{16}$	7 $\frac{1}{16}$	16.6	16 $\frac{1}{8}$	1.44	1 $\frac{11}{16}$	2.39	2 $\frac{3}{4}$	2 $\frac{1}{4}$	247	611	40.1	16700	913	15.2	1030	1010	123	3.76	204	4.46	35.4	41.6	342000		
W36×367 ^c	72.5	36.7	36 $\frac{1}{2}$	0.800	1 $\frac{9}{16}$	7 $\frac{1}{16}$	16.5	16 $\frac{1}{8}$	1.35	1 $\frac{13}{16}$	2.30	2 $\frac{1}{8}$	1 $\frac{5}{8}$	231	654	42.2	15600	854	15.1	963	940	114	3.71	176	4.40	35.2	28.7	316000		
W36×361 ^c	68.1	36.5	36 $\frac{1}{2}$	0.760	3 $\frac{1}{4}$	7 $\frac{1}{16}$	16.5	16 $\frac{1}{8}$	1.26	1 $\frac{1}{4}$	2.21	2 $\frac{1}{16}$	1 $\frac{9}{16}$	256	865	43.8	16800	89	14.8	936	468	486	3.65	137	3.25	35.7	52.9	168000		
W36×366 ^c	68.1	37.1	37 $\frac{1}{2}$	0.885	1 $\frac{7}{8}$	7 $\frac{1}{16}$	16.6	16 $\frac{1}{8}$	1.57	1 $\frac{9}{16}$	2.52	2 $\frac{1}{8}$	1 $\frac{5}{8}$	232	336	37.3	15200	719	14.6	833	411	675	3.58	107	3.18	35.3	28.0	128000		
W36×362 ^c	62.0	36.7	36 $\frac{1}{2}$	0.800	1 $\frac{9}{16}$	7 $\frac{1}{16}$	16.5	16 $\frac{1}{8}$	1.25	1 $\frac{13}{16}$	2.30	2 $\frac{1}{8}$	1 $\frac{5}{8}$	210	448	34.1	13200	719	14.6	833	411	675	3.58	107	3.18	35.3	222	116000		
W36×367 ^c	57.0	36.5	36 $\frac{1}{2}$	0.765	3 $\frac{1}{4}$	7 $\frac{1}{16}$	16.5	16 $\frac{1}{8}$	1.20	1 $\frac{1}{4}$	2.21	2 $\frac{1}{16}$	1 $\frac{9}{16}$	194	481	42.4	12100	664	14.6	767	735	977	3.15	35.2	18.5	34.7	316000			
W36×370 ^c	53.6	36.3	36 $\frac{1}{2}$	0.725	3 $\frac{1}{4}$	7 $\frac{1}{16}$	16.1	16 $\frac{1}{8}$	1.18	1 $\frac{15}{16}$	1.93	2 $\frac{1}{8}$	1 $\frac{3}{4}$	182	512	44.8	11300	623	14.5	718	347	1320	3.13	35.2	18.5	34.7	316000			
W36×370 ^c	50.1	36.2	36 $\frac{1}{2}$	0.680	1 $\frac{15}{16}$	7 $\frac{1}{16}$	12.0	12	1.18	1 $\frac{15}{16}$	1.85	2	1 $\frac{15}{16}$	170	547	47.7	10500	581	14.5	668	320	532	3.13	35.1	15.1	98500				
W36×370 ^c	47.0	36.0	36	0.650	5 $\frac{1}{8}$	5 $\frac{1}{16}$	12.0	12	1.02	1	1.77	1 $\frac{15}{16}$	1 $\frac{1}{8}$	160	538	49.9	9760	542	14.4	624	295	49.1	2.50	77.3	0.08	35.0	12.4	90200		
W36×350 ^c	44.2	35.9	35 $\frac{1}{2}$	0.625	5 $\frac{1}{8}$	5 $\frac{1}{16}$	12.0	12	0.940	1 $\frac{15}{16}$	1.57	1 $\frac{1}{8}$	1 $\frac{1}{8}$	150	537	51.9	9040	504	14.3	581	270	45.1	27.0	70.9	3.06	34.9	10.1	82200		
W36×355 ^c	39.7	35.6	35 $\frac{1}{2}$	0.600	5 $\frac{1}{8}$	5 $\frac{1}{16}$	12.0	12	0.790	1 $\frac{13}{16}$	1.54	1 $\frac{11}{16}$	1 $\frac{1}{8}$	1 $\frac{11}{16}$	135	756	54.1	780	49	14.0	509	225	37.3	58	59.7	2.98	34.6	7.00	68100	
W33×387 ^h	114	36.0	36	1.26	1 $\frac{1}{4}$	9 $\frac{1}{16}$	12.1	12 $\frac{1}{8}$	1.26	1 $\frac{1}{4}$	2.01	2 $\frac{1}{16}$	1 $\frac{9}{16}$	307	355	23.7	2300	1350	14.6	1560	1620	200	3.77	312	4.49	33.7	148	459000		
W33×387 ^c	104	35.6	35 $\frac{1}{2}$	1.16	1 $\frac{1}{4}$	9 $\frac{1}{16}$	12.1	12 $\frac{1}{8}$	1.18	1 $\frac{15}{16}$	1.93	2 $\frac{1}{16}$	1 $\frac{9}{16}$	307	345	26.5	2200	1240	14.5	1420	1460	181	3.74	282	4.44	33.5	115	408000		
W33×387 ^c	93.6	35.2	35 $\frac{1}{2}$	1.04	1 $\frac{17}{16}$	9 $\frac{1}{16}$	12.1	12 $\frac{1}{8}$	1.16	1 $\frac{13}{16}$	1.89	1 $\frac{1}{8}$	2.68	2 $\frac{1}{16}$	218	318	28.7	19500	1110	14.5	1270	1290	161	3.71	250	4.38	33.3	84.4	357000	
W33×387 ^c	85.7	34.8	34 $\frac{1}{2}$	0.960	1 $\frac{15}{16}$	9 $\frac{1}{16}$	12.0	12	1.59	1 $\frac{15}{16}$	1.73	1 $\frac{1}{4}$	2.52	2 $\frac{1}{16}$	219	291	31.3	17700	1020	14.4	1160	1160	146	3.68	226	4.33	33.1	65.1	319000	
W33×387 ^c	76.3	34.5	34 $\frac{1}{2}$	0.870	7 $\frac{1}{8}$	7 $\frac{1}{16}$	15.8	15.8	1.57	1 $\frac{1}{4}$	2.36	2 $\frac{1}{16}$	1 $\frac{7}{8}$	293 $\frac{1}{8}$	241	563	35.9	14200	831	14.1	940	933	118	3.62	182	4.29	32.8	36.2	251000	
W33×387 ^c	71.0	34.2	34 $\frac{1}{2}$	0.830	1 $\frac{3}{16}$	7 $\frac{1}{16}$	15.8	15.8	1.49	1 $\frac{13}{16}$	2.19	1 $\frac{1}{4}$	2.06	2 $\frac{1}{16}$	214	221	38.5	12000	759	14.1	857	840	106	3.59	164	4.25	32.7	27.8	224000	
W33×387 ^c	65.2	33.9	33 $\frac{1}{2}$	0.775	3 $\frac{1}{4}$	7 $\frac{1}{16}$	15.8	15.8	1.28	1 $\frac{1}{4}$	1.93	1 $\frac{1}{8}$	2.06	2 $\frac{1}{16}$	218	201	41.7	11600	773	14.0	773	749	952	3.56	147	4.21	32.5	20.8	198000	
W33×387 ^c	59.2	33.7	33 $\frac{1}{2}$	0.715	1 $\frac{15}{16}$	7 $\frac{1}{16}$	15.8	15.7	1.54	1 $\frac{1}{8}$	1.94	2	1 $\frac{1}{8}$	218	169	47.7	9290	549	13.7	629	310	539	3.51	84.4	30.3	32.6	17.7	82400		
W33×387 ^c	49.5	33.6	33 $\frac{1}{2}$	0.670	1 $\frac{1}{16}$	7 $\frac{1}{16}$	15.8	15.7	1.22	1 $\frac{1}{16}$	1.92	2 $\frac{1}{16}$	1 $\frac{3}{16}$	295 $\frac{1}{8}$	152	548	47.2	8160	487	13.5	559	273	47.2	24.7	73.9	3.01	32.4	12.4	71700	
W33×387 ^c	44.8	33.5	33 $\frac{1}{2}$	0.635	5 $\frac{1}{8}$	5 $\frac{1}{16}$	15.8	15.7	1.06	1 $\frac{1}{16}$	1.76	1 $\frac{15}{16}$	1 $\frac{1}{8}$	218	141	601	49.6	7450	448	13.4	514	246	427	24.3	66.9	2.98	32.3	9.70	64400	
W33×387 ^{c</sup}																														

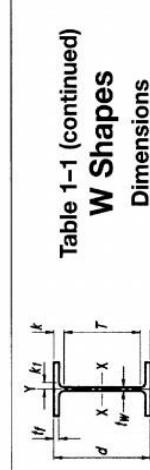


Table 1-1 (continued)
W Shapes
Dimensions

Shape	Area, <i>A</i>	Depth, <i>d</i>	Width, <i>b</i>	Thickness, $\frac{t_w}{2}$	Width, <i>b</i>	Thickness, $\frac{t_w}{2}$	Flange	Distance
	in. ²	in.	in.	in.	in.	in.	in.	in.
W30×39 ^h	115	33.2	33 ^{1/4}	1.36	1 ^{1/8}	15.6	15 ^{5/8}	2.44
×357 ^h	105	32.8	32 ^{3/4}	1.24	1 ^{1/4}	5 ^{1/8}	15 ^{1/2}	2.24
×326 ^h	95.8	32.4	32 ^{3/4}	1.14	1 ^{1/8}	5 ^{1/8}	15 ^{1/2}	2.05
×292	85.9	32.0	32	1.02	1	5 ^{1/8}	15 ^{1/2}	2.05
×261	76.9	31.6	31 ^{5/8}	0.930	1 ^{5/8}	5 ^{1/8}	15 ^{1/2}	1.96
×235	69.2	31.3	31 ^{1/4}	0.830	1 ^{3/16}	7 ^{1/16}	15.1	1.5
×211	62.2	30.9	31	0.775	3/4	7 ^{1/16}	15.1	1.52
×191 ^c	56.3	30.7	30 ^{7/8}	0.710	1 ^{1/16}	7 ^{1/16}	15.0	1.5
×173 ^c	51.0	30.4	30 ^{1/2}	0.655	5/8	5 ^{1/16}	15.0	1.5
W30×148 ^c	43.5	30.7	30 ^{5/8}	0.650	5/8	5 ^{1/16}	10.5	10 ^{1/2}
×132 ^c	38.9	30.3	30 ^{1/4}	0.615	5/8	5 ^{1/16}	10.5	10 ^{1/2}
×124 ^c	36.5	30.2	30 ^{1/8}	0.585	9/16	5 ^{1/16}	10.5	10 ^{1/2}
×116 ^c	34.2	30.0	30	0.565	9/16	5 ^{1/16}	10.5	10 ^{1/2}
×108 ^c	31.7	29.8	29 ^{9/16}	0.545	9/16	5 ^{1/16}	10.5	10 ^{1/2}
×90 ^c	26.4	29.5	29 ^{5/8}	0.520	1/2	7/16	10.5	10 ^{1/2}
W27×339 ^h	159	32.5	32 ^{1/2}	1.97	2	1	15.3	15 ^{1/4}
×368 ^h	108	30.4	30 ^{7/8}	1.38	1 ^{1/8}	5 ^{1/16}	14 ^{7/16}	2.48
×336 ^h	98.9	30.0	30	1.26	1 ^{1/8}	5 ^{1/8}	14 ^{1/2}	2.28
×307 ^h	90.4	29.6	29 ^{5/8}	1.16	1 ^{1/16}	5 ^{1/16}	14 ^{1/2}	2.09
×281	82.9	29.3	29 ^{7/16}	1.06	1 ^{1/16}	5 ^{1/16}	14 ^{1/2}	1.93
×258	76.0	29.0	29	0.980	1	14.3	14 ^{1/4}	1.77
×235	69.4	28.7	28 ^{5/8}	0.910	1 ^{5/16}	7 ^{1/2}	14 ^{1/4}	1.61
×217	64.0	28.4	28 ^{3/4}	0.830	1 ^{9/16}	14.1	14 ^{1/4}	1.50
×194	57.2	28.1	28 ^{1/8}	0.750	3/4	14.0	14	1.34
×178	52.5	27.8	27 ^{5/8}	0.725	3/4	14.1	14.1	1.19
×161 ^c	47.6	27.6	27 ^{5/16}	0.660	1 ^{1/16}	3/4	14.0	1.08
×146 ^c	43.1	27.4	27 ^{3/8}	0.605	5/8	5 ^{1/16}	14.0	0.975
W27×129 ^c	37.8	27.6	27 ^{5/8}	0.610	5/8	5 ^{1/16}	10.0	1.10
×114 ^c	33.5	27.3	27 ^{1/4}	0.570	9/16	5 ^{1/16}	10.1	10 ^{1/2}
×102 ^c	30.0	27.1	27 ^{1/8}	0.515	1/2	5 ^{1/16}	10.0	10
×94 ^c	27.7	26.9	26 ^{5/8}	0.490	5/8	5 ^{1/16}	10.0	10
×84 ^c	24.8	26.7	26 ^{3/4}	0.460	7/16	5 ^{1/16}	10.0	10

^c Shape is slender for compression with $F_c = 50$ ksi.
^h The actual size combination, and orientation of fastener components should be compared with the geometry of the cross-section to ensure compatibility.
^b Flange thickness greater than 2 in. for special requirements may apply per AISC Specification Section G2.1a with $f_r = 50$ ksi.
^v Shape does not meet the t/t_w limit for shear in Specification Section G2.1a with $f_r = 50$ ksi.

Table 1-1 (continued)
W Shapes
Properties

Non-compact Section Criteria	Compact Section Criteria			Axis X-X			Axis Y-Y			Torsional Properties			
	$\frac{h}{t_w}$	$\frac{h}{t_w}$	$\frac{h}{t_w}$	I_x	I_y	I_z	S	I	S	I	S	J	C_w
391	3.19	19.7	207.0	1250	134	1450	198	198	367	310	173	4.37	30.8
357	3.45	21.6	187.0	1140	133	1320	179	179	364	279	134	4.32	30.6
326	3.75	23.4	168.0	1040	132	1190	162	162	360	252	103	4.27	30.4
292	4.12	26.2	149.0	930	132	1060	110	114	352	230	75.2	4.22	30.2
261	4.59	28.7	131.00	829	131	943	959	127	353	196	54.1	4.16	30.0
235	5.02	32.2	117.00	748	130	847	855	114	351	175	41.3	4.03	29.8
211	5.74	34.5	103.00	665	129	751	757	100	349	155	41.0	4.06	29.5
191 ^c	6.35	37.7	92.00	600	128	675	673	89.5	346	138	4.07	29.5	21.0
173 ^c	7.04	40.8	82.30	541	127	607	598	79.8	342	123	4.03	29.4	15.6
146	8.44	41.6	68.80	436	124	500	227	43.3	2.28	68.0	2.77	29.5	14.5
122	5.27	43.9	57.70	380	122	437	196	37.2	2.25	58.4	2.75	29.3	9.72
108	5.65	46.2	53.60	355	121	408	181	34.4	2.23	54.0	2.73	29.2	7.98
106	6.17	47.8	49.30	329	120	378	164	31.3	2.19	49.2	2.70	29.2	6.43
104	6.89	49.6	44.70	298	11.9	346	146	27.9	2.15	43.9	2.66	29.1	4.99
102	7.50	51.3	39.90	269	11.7	312	128	32.6	2.10	38.6	2.62	29.0	3.77
100	9.9	58.0	51.9	39.90	269	11.7	283	115	22.1	2.09	34.7	2.60	28.9
98	10.52	57.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
96	10.8	57.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
94	11.5	56.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
92	12.2	56.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
90	12.9	55.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
88	13.6	55.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
86	14.3	54.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
84	15.0	54.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
82	15.7	53.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
80	16.4	53.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
78	17.1	52.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
76	17.8	52.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
74	18.5	51.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
72	19.2	51.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
70	19.9	50.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
68	20.6	50.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
66	21.3	49.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
64	22.0	49.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
62	22.7	48.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
60	23.4	48.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
58	24.1	47.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
56	24.8	47.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
54	25.5	46.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
52	26.2	46.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
50	26.9	45.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
48	27.6	45.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
46	28.3	44.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
44	29.0	44.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
42	29.7	43.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
40	30.4	43.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
38	31.1	42.5	3610	245	11.7	283	115	22.1	2.09	34.7	2.60	28.9	2.64
36	31.8	42.0	3610	245	11.7	283	115	22.1	2.09	34.7	2.60</		




Table 1-1 (continued)
W Shapes
Dimensions


Shape	Area, A	Depth, d	Web Thickness, t_w	Web $\frac{t_w}{2}$	Flange			Distance			Axis X-X			Axis Y-Y			Torsional Properties				
					Width, b_f	Thickness, t_f	$\frac{t_f}{2}$	k	k_{des}	k_{ext}	k_t	T	k_t	I	S	r	Z	I	S		
W24x370 ^b	109	28.0	28	1.52	1 1/2	3/4	13/16	1 3/8	2.72	2 1/4	3.22	3 5/8	1 9/16	20 3/4	5 1/2	2.51	14.2	13400	957	11.1	
W24x355 ^b	98.4	27.5	27 1/2	3.38	1 1/16	13.5	13 1/2	2.48	2 1/2	2.98	3 5/8	1 1/2	17/16	19/16	11.0	1020	1030	152	3.23	238	
W24x306 ^b	89.8	27.1	27 1/8	2.26	1 1/4	5/8	13.4	13 3/4	2.28	2 1/4	2.78	3 3/16	1 7/16	17/16	19/16	10.9	922	919	137	3.20	214
W24x279 ^b	82.6	26.7	26 7/8	1.16	1 1/16	5/8	13.3	13 1/4	2.09	2 1/16	2.59	3 1/16	1 7/16	17/16	19/16	10.8	835	823	124	3.19	193
W24x250 ^b	73.5	26.3	26 3/8	1.04	1 1/16	9/16	13.2	13 1/8	1.88	1 1/8	2.39	2 13/16	1 3/8	17/16	19/16	10.7	744	724	110	3.14	171
W24x229 ^b	67.2	26.0	26	0.860	19/16	7/8	13.1	13 1/8	1.73	1 1/4	2.23	2 7/8	1 9/16	17/16	19/16	10.7	658	588	107	3.71	245
W24x207 ^b	60.7	25.7	25 5/8	0.870	7/8	7/16	13.0	13	1.57	1 9/16	2.07	2 1/2	1 1/4	17/16	19/16	10.6	586	531	106	3.67	243
W24x192 ^b	56.3	25.5	25 1/2	0.810	7/16	7/16	13.0	13	1.46	1 7/16	1.96	2 1/8	1 1/4	17/16	19/16	10.5	559	530	105	3.62	241
W24x176 ^b	51.7	25.2	25 1/4	0.750	7/16	3/8	12.9	12 7/8	1.34	1 9/16	1.84	2 1/4	1 9/16	17/16	19/16	10.5	530	491	105	3.61	240
W24x162 ^b	47.7	25.0	25	0.705	11/16	3/8	13.0	13	1.22	1 1/4	1.72	2 1/8	1 9/16	17/16	19/16	10.5	511	479	104	3.07	126
W24x146 ^b	43.2	24.7	24 9/16	0.650	5/8	5/16	12.9	12 7/8	1.09	1 1/6	1.59	2	1 1/8	17/16	19/16	10.4	488	437	103	3.01	116
W24x131 ^b	38.5	24.5	24 1/2	0.805	5/8	5/16	12.9	12 7/8	0.960	1 5/16	1.46	1 1/8	1 1/8	17/16	19/16	10.2	420	370	102	3.07	106
W24x117 ^b	34.4	24.3	24 1/4	0.850	5/16	7/16	12.8	12 3/4	0.850	7/8	1.35	1 1/4	1 1/8	17/16	19/16	10.1	384	354	101	2.97	96.5
W24x104 ^b	30.6	24.1	24	0.500	1/2	7/16	12.8	12 3/4	0.750	3/4	1.25	1 1/8	1 1/6	17/16	19/16	10.1	3100	288	101	2.91	62.4
W24x103 ^c	30.3	24.5	24 1/2	0.550	9/16	5/16	9.00	9	0.980	1	1.48	1 1/8	1 1/8	20 3/4	5 1/2	10.0	280	264	119	2.65	156
W24x94 ^c	27.0	24.3	24 1/4	0.515	1/2	7/16	9.07	9/16	0.875	7/8	1.38	1 1/4	1 1/8	17/16	19/16	9.97	270	222	109	2.40	123
W24x84 ^c	24.7	24.1	24 1/4	0.470	1/2	7/16	9.02	9	0.770	3/4	1.27	1 1/4	1 1/8	17/16	19/16	9.79	224	196	109	2.40	123
W24x76 ^c	22.4	23.9	23 7/8	0.440	7/16	7/16	8.89	9	0.680	1 1/16	1.18	1 9/16	1 1/8	17/16	19/16	76	661	490	2100	176	82.5
W24x68 ^c	20.1	23.7	23 3/4	0.415	7/16	7/16	8.97	9	0.585	9/16	1.09	1 1/8	1 1/6	17/16	19/16	76	766	520	1830	154	95.5
W24x62 ^c	18.2	23.7	23 3/4	0.430	7/16	7/16	7.04	7	0.590	1 1/8	1.09	1 1/2	1 1/6	20 3/4	3 1/2	62	5.97	50.1	1550	9.23	153
W24x55 ^c	16.2	23.6	23 5/8	0.395	3/8	3/16	7.01	7	0.505	1/2	1.01	1 1/8	1 1/6	20 3/4	3 1/2	55	6.94	54.6	1350	114	29.1
W21x201 ^b	59.2	23.0	23	0.910	15/16	1/2	12.6	12 5/8	1.63	1 5/8	2.13	2 1/2	1 5/8	18	5 1/2	201	3.86	20.6	5310	461	9.47
W21x182 ^b	53.6	22.7	22 23/4	0.830	13/16	1/2	12.5	12 1/2	1.48	1 1/2	1.98	2 9/16	1 1/4	17/16	19/16	182	4.22	22.6	4730	417	9.40
W21x166 ^b	48	22.5	22 1/2	0.750	3/4	3/8	12.4	12 1/2	1.36	1 3/8	1.86	2 1/4	1 1/2	17/16	19/16	166	4.57	25.0	4280	380	9.36
W21x147 ^b	43.2	22.1	22	0.720	3/4	3/8	12.4	12 1/2	1.15	1 1/2	1.65	2 1/4	1 1/2	17/16	19/16	147	5.44	26.1	3630	329	9.17
W21x132 ^b	38.8	21.8	21 7/8	0.550	5/8	5/16	12.4	12 1/2	1.04	1 1/6	1.54	1 5/16	1 1/8	17/16	19/16	132	6.01	28.9	3220	285	9.12
W21x122 ^b	35.9	21.7	21 5/8	0.600	5/8	5/16	12.4	12 1/2	0.960	1 5/16	1.46	1 13/16	1 1/8	17/16	19/16	122	6.45	31.3	2960	273	9.09
W21x111 ^b	32.7	21.5	21 1/2	0.550	9/16	5/16	12.3	12 1/4	0.800	1 3/16	0.875	1 7/8	1 1/8	17/16	19/16	111	7.05	34.1	2670	249	4.45
W21x101 ^c	29.8	21.4	21 3/8	0.500	1/2	7/16	12.3	12 1/4	1.30	1 1/16	1.38	1 1/4	1 1/8	17/16	19/16	101	7.68	37.5	2420	227	40.3

^c Shape is slender for compression with $F_c = 50$ ksi.
^b The actual size, combination, and orientation of fastener components should be compared with the geometry of the cross section to ensure compatibility.
^a Special requirements may apply per AISC Specification Section G3.1c.
^v Shape does not meet the H_f limit for shear in Specification Section G2.1a with $F_y = 50$ ksi.

T		W24 - W21	
---	--	-----------	--

Table 1-1 (continued)
W Shapes
Properties

Table 1-1 (continued)
W Shapes
Dimensions



Shape	Area, <i>A</i>	Depth, <i>d</i>	Web Thickness, <i>t_w</i>	Width, <i>b_f</i>	Flange Thickness, <i>t_f</i>	Distance, <i>k</i>	Distance, <i>k_{ext}</i>	Workable Gauge
	in. ²	in.	in.	in.	in.	in.	in.	in.
W21x93	27.3	21.6	21 ^{5/8}	0.580	9 ^{5/16}	8.42	8 ^{3/8}	0.930
x63 ^c	24.3	21.4	21 ^{9/16}	0.515	7 ^{1/2}	8.36	8 ^{3/8}	0.835
x73 ^c	21.5	21.2	21 ^{1/4}	0.455	7 ^{1/2}	8.30	8 ^{1/4}	0.740
x68 ^c	20.1	21.1	21 ^{1/8}	0.430	7 ^{1/2}	8.27	8 ^{1/4}	0.685
x62 ^c	18.3	21.0	21	0.400	7 ^{1/2}	8.24	8 ^{1/4}	0.635
x55 ^c	16.2	20.8	20 ^{5/8}	0.375	7 ^{1/2}	8.22	8 ^{1/4}	0.522
x48 ^c	14.1	20.6	20 ^{9/16}	0.350	7 ^{1/2}	8.14	8 ^{1/8}	0.430
W21x57 ^c	21.1	21	40.05	3 ^{1/2}	9 ^{1/2}	6.56	6 ^{1/2}	0.650
x50 ^c	14.7	20.8	20 ^{9/16}	0.380	3 ^{1/2}	6.53	6 ^{1/2}	0.535
x44 ^c	13.0	20.7	20 ^{9/16}	0.350	3 ^{1/2}	6.50	6 ^{1/2}	0.450
W18x31 ^h	91.6	22.3	22 ^{9/16}	1.52	1 ^{1/2}	3 ^{1/4}	12.0	2.74
x283 ⁿ	83.3	21.9	21 ^{9/16}	1.40	1 ^{3/8}	1 ^{11/16}	11.9	2.50
x258 ⁿ	75.9	21.5	21 ^{1/2}	1.28	1 ^{1/4}	11.4	11 ^{1/2}	2.30
x234 ⁿ	68.8	21.1	21	1.16	1 ^{1/4}	11.7	11 ^{9/16}	2.11
x211	62.1	20.7	20 ^{5/8}	1.06	1 ^{1/16}	9 ^{1/8}	11.6	1.91
x192	56.4	20.4	20 ^{9/16}	0.960	7 ^{1/2}	11.5	11 ^{1/2}	1.75
x175	51.3	20.0	20	0.890	7 ^{1/2}	11.4	11 ^{9/16}	1.99
x158	46.3	19.7	19 ^{9/16}	0.810	7 ^{1/2}	11.3	11 ^{1/4}	1.44
x143	42.1	19.5	19 ^{1/2}	0.730	7 ^{1/2}	11.2	11 ^{1/4}	1.32
x130	38.2	19.3	19 ^{1/4}	0.670	7 ^{1/2}	11.2	11 ^{1/8}	1.20
x119	35.1	19.0	19	0.635	7 ^{1/2}	11.3	11 ^{1/4}	1.06
x106	31.1	18.7	18 ^{9/16}	0.590	7 ^{1/2}	11.2	11 ^{1/4}	0.940
x86	28.5	18.6	18 ^{9/16}	0.535	7 ^{1/2}	11.1	11 ^{1/8}	0.870
x76 ^c	22.3	18.2	18 ^{1/2}	0.480	7 ^{1/2}	11.1	11 ^{1/8}	0.770
W18x71	20.8	18.5	18 ^{1/2}	0.495	7 ^{1/2}	7.64	7 ^{5/8}	0.810
x65	19.1	18.4	18 ^{9/16}	0.450	7 ^{1/2}	7.6	7 ^{5/8}	0.750
x60 ^c	17.6	18.2	18 ^{1/2}	0.415	7 ^{1/2}	7.56	7 ^{5/8}	0.695
x55 ^c	16.2	18.1	18 ^{1/8}	0.390	7 ^{1/2}	7.53	7 ^{1/2}	0.630
x50 ^c	14.7	18.0	18	0.355	7 ^{1/2}	7.50	7 ^{1/2}	0.570
W18x46 ^c	133.5	18.1	18	0.380	3 ^{1/2}	6.06	6	0.605
x40 ^c	11.8	17.9	17 ^{7/16}	0.315	3 ^{1/2}	6.02	6	0.525
x35 ^c	10.3	17.7	17 ^{9/16}	0.300	3 ^{1/2}	6.00	6	0.425

^c Shape is slender for compression with $F_c = 50$ ksi.

^f Shape exceeds compact limit for flexure with $F_c = 50$ ksi.


^g The actual size, combination, and orientation of fastener components should be compared with the geometry of the cross-section to ensure compatibility.

^h Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1c.

Table 1-1 (continued)
W Shapes
Properties

Shape	Area, <i>A</i>	Depth, <i>d</i>	Web Thickness, <i>t_w</i>	Width, <i>b_f</i>	Flange Thickness, <i>t_f</i>	Distance, <i>k</i>	Distance, <i>k_{ext}</i>	Axis X-X			Axis Y-Y			Torsional Properties		
								Compact Section Criteria	Non-Compact Criteria							
	in. ²	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.	in.
W21x93	27.3	21.6	21 ^{5/8}	0.580	9 ^{5/16}	8.42	8 ^{3/8}	0.930	15 ^{1/8}	1.43	15 ^{1/8}	19 ^{9/16}	18 ^{3/8}	5 ^{1/2}	22.1	1.84
x63 ^c	24.3	21.4	21 ^{9/16}	0.515	7 ^{1/2}	8.36	8 ^{3/8}	0.835	13 ^{1/8}	1.34	11 ^{1/2}	7 ^{1/8}	18 ^{3/8}	5 ^{1/2}	22.1	1.84
x73 ^c	21.5	21.2	21 ^{1/4}	0.455	7 ^{1/2}	8.40	8 ^{1/4}	0.740	12 ^{1/4}	1.24	11 ^{1/8}	7 ^{1/8}	18 ^{3/8}	5 ^{1/2}	22.1	1.83
x68 ^c	20.1	21.1	21 ^{1/8}	0.430	7 ^{1/2}	8.27	8 ^{1/4}	0.685	11 ^{1/8}	1.19	11 ^{1/8}	7 ^{1/8}	18 ^{3/8}	5 ^{1/2}	22.1	1.82
x62 ^c	18.3	21.0	21	0.400	7 ^{1/2}	8.24	8 ^{1/4}	0.615	9 ^{1/8}	1.12	11 ^{1/8}	7 ^{1/8}	18 ^{3/8}	5 ^{1/2}	22.1	1.81
x55 ^c	16.2	20.8	20 ^{5/8}	0.375	7 ^{1/2}	8.22	8 ^{1/4}	0.522	7 ^{1/2}	1.02	13 ^{1/8}	7 ^{1/8}	18 ^{3/8}	5 ^{1/2}	22.1	1.80
x48 ^c	14.1	20.6	20 ^{9/16}	0.350	7 ^{1/2}	8.14	8 ^{1/8}	0.430	7 ^{1/8}	9.50	11 ^{1/8}	7 ^{1/8}	18 ^{3/8}	5 ^{1/2}	22.1	1.79
W21x57 ^c	21.1	21	40.05	3 ^{1/2}	9 ^{1/2}	6.56	6 ^{1/2}	0.650	5 ^{1/2}	1.15	15 ^{1/8}	7 ^{1/8}	18 ^{3/8}	3 ^{1/2}	22.1	1.78
x50 ^c	14.7	20.8	20 ^{9/16}	0.380	3 ^{1/2}	6.53	6 ^{1/2}	0.535	9 ^{1/8}	1.04	11 ^{1/4}	7 ^{1/8}	18 ^{3/8}	3 ^{1/2}	22.1	1.77
x44 ^c	13.0	20.7	20 ^{9/16}	0.350	3 ^{1/2}	6.50	6 ^{1/2}	0.450	7 ^{1/8}	0.950	11 ^{1/8}	7 ^{1/8}	18 ^{3/8}	3 ^{1/2}	22.1	1.76
W18x31 ^h	91.6	22.3	22 ^{9/16}	1.52	1 ^{1/2}	3 ^{1/4}	12.0	2.74	2 ^{3/4}	3.24	3 ^{1/8}	1 ^{1/8}	15 ^{1/2}	5 ^{1/2}	22.1	1.76
x283 ⁿ	83.3	21.9	21 ^{9/16}	1.40	1 ^{3/8}	1 ^{11/16}	11.9	2.50	2 ^{1/2}	3.00	3 ^{1/8}	1 ^{1/8}	15 ^{1/2}	5 ^{1/2}	22.1	1.76
x258 ⁿ	75.9	21.5	21 ^{1/2}	1.28	1 ^{1/4}	11.4	11 ^{1/4}	2.30	2 ^{5/16}	2.70	3	1 ^{1/4}	15 ^{1/2}	5 ^{1/2}	22.1	1.76
x234 ⁿ	68.8	21.1	21	1.16	1 ^{1/4}	11.7	11 ^{9/16}	2.11	2 ^{5/16}	2.51	2 ^{1/4}	15 ^{1/2}	5 ^{1/2}	22.1	1.76	
x211	62.1	20.7	20 ^{5/8}	1.06	1 ^{1/16}	9 ^{1/8}	11.6	1.91	1 ^{15/16}	2.31	2 ^{9/16}	1 ^{1/8}	15 ^{1/2}	5 ^{1/2}	22.1	1.76
x192	56.4	20.4	20 ^{9/16}	0.960	7 ^{1/2}	11.5	11 ^{1/2}	1.75	2 ^{15/16}	2.78	1 ^{1/8}	1 ^{1/8}	15 ^{1/2}	5 ^{1/2}	22.1	1.76
x175	51.3	20.0	20	0.890	7 ^{1/2}	11.4	11 ^{9/16}	1.99	2 ^{7/16}	3.00	1 ^{1/8}	1 ^{1/8}	15 ^{1/2}	5 ^{1/2}	22.1	1.76
x158	46.3	19.7	19 ^{9/16}	0.810	7 ^{1/2}	11.3	11 ^{1/4}	1.44	2 ^{7/16}	1.84	2 ^{1/8}	1 ^{1/4}	15 ^{1/2}	5 ^{1/2}	22.1	1.76
x143	42.1	19.5	19 ^{1/2}	0.730	7 ^{1/2}	11.2	11 ^{1/4}	1.32	2 ^{7/16}	1.72	2 ^{1/8}	1 ^{1/4}	15 ^{1/2}	5 ^{1/2}	22.1	1.76
x130	38.2	19.3	19 ^{1/4}	0.670	7 ^{1/2}	11.2	11 ^{1/8}	1.20	2 ^{13/16}	1.60	2 ^{1/8}	1 ^{1/8}	15 ^{1/2}	5 ^{1/2}	22.1	1.76
x119	35.1	19.0	19	0.635	7 ^{1/2}	11.3	11 ^{1/4}	1.06	1 ^{15/16}	1.46	1 ^{1/8}	1 ^{1/8}	15 ^{1/2}	5 ^{1/2}	22.1	1.76
W18x71	20.8	18.5	18 ^{1/2}	0.495	7 ^{1/2}	7.64	7 ^{5/8}	0.810	13 ^{1/8}	1.21	1 ^{1/2}	7 ^{1/8}	15 ^{1/2}	3 ^{1/2}	22.1	1.76
x65	19.1	18.4	18 ^{9/16}	0.450	7 ^{1/2}	7.6	7 ^{5/8}	0.750	13 ^{1/8}	1.34	1 ^{1/2}	7 ^{1/8}	15 ^{1/2}	3 ^{1/2}	22.1	1.76
x60 ^c	17.6	18.2	18 ^{1/2}	0.415	7 ^{1/2}	7.56	7 ^{5/8}	0.695	13 ^{1/8}	1.10	1 ^{1/8}	7 ^{1/8}	15 ^{1/2}	3 ^{1/2}	22.1	1.76
x55 ^c	16.2	18.1	18 ^{1/8}	0.390	7 ^{1/2}	7.53	7 ^{1/2}	0.630	13 ^{1/8}	1.03	1 ^{5/16}	7 ^{1/8}	15 ^{1/2}	3 ^{1/2}	22.1	1.76
x50 ^c	14.7	18.0	18	0.355	7 ^{1/2}	7.50	7 ^{1/2}	0.570	9 ^{1/8}	0.972	1 ^{1/4}	7 ^{1/8}	15 ^{1/2}	3 ^{1/2}	22.1	1.76
W18x46 ^c	133.5	18.1	18	0.380	3 ^{1/2}	6.06	6	0.605	5 ^{1/8}	1.01	1 ^{1/4}	7 ^{1/8}	15 ^{1/2}	3 ^{1/2}	2	

Table 1-1 (continued)
W Shapes
Dimensions



Shape	Area, A	Depth, d	Web Thickness, t_w	Width, b_f	Flange Thickness, t_f	Distance, k	Workable Gauge
	in. ²	in.	in.	in.	in.	in.	in.
W16x100	295	17.0	1.7	5.85	9 $\frac{1}{16}$	10.4	10 $\frac{1}{8}$
x89	26.2	16 $\frac{3}{4}$	0.525	5 $\frac{1}{2}$	9 $\frac{1}{16}$	10 $\frac{3}{8}$	9 $\frac{1}{8}$
x77	22.6	16 $\frac{1}{2}$	0.455	5 $\frac{1}{16}$	9 $\frac{1}{16}$	10.2	10 $\frac{1}{4}$
x67 ^c	19.7	16.3	16 $\frac{3}{8}$	3 $\frac{3}{8}$	9 $\frac{1}{16}$	10.2	10 $\frac{1}{4}$
W16x57	163	16.4	16 $\frac{1}{8}$	0.430	7 $\frac{1}{16}$	7.12	7 $\frac{1}{8}$
x50 ^c	14.7	16.3	16 $\frac{1}{4}$	0.380	9 $\frac{1}{16}$	7 $\frac{1}{8}$	7 $\frac{1}{8}$
x45 ^c	13.3	16.1	16 $\frac{1}{8}$	0.345	9 $\frac{1}{16}$	7.04	7
x40 ^c	11.8	16.0	16	0.305	5 $\frac{1}{16}$	7.00	7
x36 ^c	10.6	15.9	15 $\frac{7}{8}$	0.295	5 $\frac{1}{16}$	6.98	7
W16x31 ^c	913	15.9	15 $\frac{1}{8}$	0.275	9 $\frac{1}{16}$	5.53	5 $\frac{1}{8}$
x26 ^{c,v}	7.68	15 $\frac{1}{4}$	0.250	9 $\frac{1}{16}$	5 $\frac{5}{8}$	5 $\frac{1}{2}$	3 $\frac{1}{2}$
W14x730 ^b	215	22.4	22 $\frac{3}{8}$	3.07	3 $\frac{1}{16}$	17.9	17 $\frac{1}{8}$
x665 ^b	196	21.6	21 $\frac{1}{8}$	2.83	2 $\frac{9}{16}$	17.7	17 $\frac{1}{8}$
x605 ^b	178	20.9	20 $\frac{7}{8}$	2.60	2 $\frac{9}{16}$	15 $\frac{1}{2}$	17 $\frac{1}{8}$
x550 ^b	162	20.2	20 $\frac{1}{2}$	2.38	2 $\frac{9}{16}$	17 $\frac{1}{8}$	17 $\frac{1}{8}$
x500 ^b	147	19.6	19 $\frac{5}{8}$	2.19	2 $\frac{9}{16}$	17.0	17
x455 ^b	134	19.0	19	2.02	2 $\frac{9}{16}$	16.8	17
x426 ^b	125	18.7	18 $\frac{3}{8}$	1.88	2 $\frac{9}{16}$	16 $\frac{1}{2}$	16 $\frac{1}{2}$
x398 ^b	117	18.3	18 $\frac{1}{4}$	1.77	1 $\frac{3}{4}$	7 $\frac{1}{8}$	16 $\frac{1}{2}$
x370 ^b	109	17.9	17 $\frac{7}{8}$	1.66	1 $\frac{3}{4}$	7 $\frac{1}{8}$	16 $\frac{1}{2}$
x342 ^b	101	17.5	17 $\frac{1}{2}$	1.54	1 $\frac{9}{16}$	16 $\frac{1}{4}$	16 $\frac{1}{2}$
x311 ^b	91	17.1	17 $\frac{1}{8}$	1.41	1 $\frac{7}{16}$	16 $\frac{1}{2}$	16 $\frac{1}{2}$
x283 ^b	83.3	16.7	16 $\frac{3}{4}$	1.29	1 $\frac{9}{16}$	16 $\frac{1}{8}$	16 $\frac{1}{8}$
x257	75.6	16.5	16 $\frac{1}{8}$	1.18	1 $\frac{3}{16}$	5 $\frac{1}{8}$	16 $\frac{1}{8}$
x233	68.5	16.0	16	1.07	1 $\frac{1}{16}$	9 $\frac{1}{16}$	15 $\frac{1}{8}$
x211	62.0	15.7	15 $\frac{3}{4}$	0.980	1 $\frac{1}{8}$	1 $\frac{1}{2}$	15 $\frac{1}{8}$
x193	56.8	15.5	15 $\frac{1}{2}$	0.890	7 $\frac{1}{8}$	15.7	15 $\frac{1}{8}$
x176	51.8	15.2	15 $\frac{1}{4}$	0.830	9 $\frac{1}{16}$	7 $\frac{1}{8}$	15 $\frac{1}{8}$
x159	46.7	15.0	15	0.745	3 $\frac{1}{8}$	15.6	15 $\frac{1}{8}$
x145	42.7	14.8	14 $\frac{3}{4}$	0.680	10 $\frac{1}{16}$	15.5	15 $\frac{1}{8}$

^c Shape is slender for compression with $F_y = 50$ ksi.

^b The actual size combination, and orientation of fastener components should be compared with the geometry of the cross-section to ensure compatibility.

^b Flange thickness greater than 2 in. Special requirements may apply per AISC Specification Section A3.1.c.

^v Shape does not meet the n_f limit for shear in Specification Section G2.1a with $F_y = 50$ ksi.

T
W16 – W14

Table 1-1 (continued)
W Shapes
Properties

Non- Nom- inal Wt.	$\frac{b_f}{2t}$	$\frac{h}{2t}$	Compact Section Criteria	Axis X-X			Axis Y-Y			Torsional Properties		
				I_x	h	I_y	I_x	S	r	I_y	S	r
100	5.29	24.3	1490	175	7.10	198	186	35.7	2.51	54.9	282	16.0
89	5.92	27.0	1300	155	7.05	175	163	31.4	2.49	48.1	2.88	15.9
77	6.77	31.2	1110	134	7.00	150	138	26.9	2.47	41.1	2.85	15.8
67	7.70	35.5	954	117	6.96	130	119	23.2	2.46	35.5	2.82	15.7
57	4.98	33.0	758	92.2	6.72	105	43.1	12.1	1.60	18.9	1.92	15.7
50	5.61	37.4	659	81.0	6.68	92.0	37.2	10.5	1.59	16.3	1.89	15.6
45	6.23	41.1	586	72.7	6.65	82.3	32.8	9.34	1.57	1.5	1.88	15.6
40	6.93	46.5	518	64.7	6.63	73.0	12.7	1.86	15.5	0.794	1.73	15.0
36	8.12	48.1	448	56.5	6.51	64.0	24.5	7.00	1.52	10.8	1.83	15.4
31	6.28	51.6	375	47.2	6.41	54.0	12.4	4.49	1.17	7.03	1.42	15.4
26	7.97	56.8	301	38.4	6.26	44.2	9.59	3.49	1.12	5.48	1.38	15.3
730	1.82	3.71	14300	1280	8.17	1660	4720	527	4.69	816	5.68	1450
665	1.95	4.03	12400	1150	7.98	1480	4170	472	4.62	730	5.57	17.1
605	2.09	4.39	10800	1040	7.80	1320	3680	423	4.56	632	5.36	16.4
550	2.25	4.79	9430	931	7.63	1180	3250	378	4.49	533	3.96	21900
500	2.43	5.21	8210	838	7.48	1050	2880	339	4.43	522	5.26	16.1
455	2.62	5.62	7190	756	7.33	936	2450	306	5.17	536	4.00	18700
426	2.65	5.75	6080	6600	7.26	869	2360	283	4.34	434	5.11	15.6
398	2.92	6.44	6000	656	7.16	801	2170	262	4.31	402	5.06	15.4
342	3.31	7.41	5440	607	7.07	736	1950	241	4.27	370	5.00	15.3
311	3.59	8.09	4330	506	6.98	603	1610	221	4.24	336	4.94	15.1
283	3.88	8.84	3840	459	6.79	542	1440	179	4.17	274	4.81	14.7
257	4.26	9.75	3400	415	6.71	487	1280	161	4.13	246	4.75	14.5
233	4.62	10.7	3010	375	6.63	436	1150	145	4.10	221	4.69	14.3
211	5.06	11.6	2660	338	6.55	390	1030	130	4.07	198	4.64	14.2
193	5.45	12.8	2400	310	6.50	355	931	119	4.05	180	4.48	14.8
176	5.76	13.7	2140	281	6.43	320	838	107	4.02	163	4.55	13.9
159	6.54	15.3	1900	254	6.38	287	748	96.2	4.00	146	4.51	13.8
145	7.11	16.8	1710	232	6.33	260	677	87.3	3.98	133	4.47	13.7

Table 1-1 (continued)
W Shapes
Dimensions

Shape	Area, <i>A</i>	Depth, <i>d</i>	Web Thickness, <i>t_w</i>	Flange Thickness, <i>t_f</i>	Width, <i>b</i>	Flange Distance, <i>k</i>	Thickness, <i>t</i>	Workable Gage, <i>kg</i>	Section Modulus, <i>K</i>	Distance, <i>k</i>	Thickness, <i>t</i>	Section Modulus, <i>K</i>	Distance, <i>k</i>	Thickness, <i>t</i>	Section Modulus, <i>K</i>
W14x132	38.8	14.7	14 ^{5/8}	0.645	5 ^{1/8}	14.7	14 ^{3/4}	1.03	1	1.63	2 ^{9/16}	10	5 ^{1/2}		
x120	35.3	14.5	14 ^{1/2}	0.590	9 ^{1/16}	14.7	14 ^{5/8}	0.940	1 ^{5/16}	1.54	2 ^{1/4}	1 ^{1/2}			
x109	32.0	14.3	14 ^{1/8}	0.525	5 ^{1/2}	14	14 ^{3/8}	0.860	1 ^{7/16}	1.46	2 ^{9/16}	1 ^{1/2}			
x98 ^c	29.1	14.2	14 ^{1/8}	0.485	5 ^{1/2}	14	14 ^{6/8}	0.780	3/4	1.38	2 ^{1/16}	1 ^{7/16}			
x90 ^d	26.5	14.0	14	0.440	7 ^{1/16}	14	14 ^{5/8}	0.710	1 ^{1/16}	1.31	2	1 ^{7/16}			
W14x82	24.0	14.3	14 ^{1/4}	0.510	5 ^{1/2}	14	10.1	10 ^{1/8}	0.855	7 ^{1/8}	1.45	1 ^{11/16}	1 ^{1/16}	10 ^{7/8}	5 ^{1/2}
x74	21.8	14.2	14 ^{1/8}	0.450	7 ^{1/16}	14	10.1	10 ^{1/8}	0.785	7 ^{1/16}	1.38	5 ^{1/8}	1 ^{1/16}		
x68	20.0	14.0	14	0.415	7 ^{1/16}	14	10.0	0.720	3/4	1.31	9 ^{1/16}	1 ^{1/16}			
x61	17.9	13.9	13 ^{7/8}	0.375	3 ^{1/8}	16	10.0	10	0.645	5/8	1.24	1 ^{1/2}	1		
W14x53	15.6	13.9	13 ^{7/8}	0.370	3 ^{1/8}	16	8.06	8	0.660	1 ^{1/16}	1.25	1 ^{1/2}	1	10 ^{7/8}	5 ^{1/2}
x48	14.1	13.8	13 ^{3/4}	0.340	5 ^{1/16}	16	8.03	8	0.565	5/8	1.19	1 ^{7/16}	1		
x43 ^c	12.6	13.7	13 ^{7/8}	0.305	5 ^{1/16}	16	8.00	8	0.550	5/8	1.12	1 ^{3/8}	1		
W14x38 ^c	11.2	14.1	14 ^{1/8}	0.310	5 ^{1/16}	16	6.77	6 ^{3/4}	0.455	7 ^{1/2}	0.915	1 ^{1/4}	1 ^{3/16}	11 ^{5/16}	3 ^{1/2}
x34 ^c	10.0	14.0	14	0.285	5 ^{1/16}	16	6.75	6 ^{3/4}	0.455	7 ^{1/2}	0.855	1 ^{1/16}	3 ^{1/4}		
x30 ^c	8.85	13.8	13 ^{7/8}	0.270	5 ^{1/16}	16	6.73	6 ^{3/4}	0.365	3/8	0.785	1 ^{1/16}	3 ^{1/4}		
W14x26 ^c	7.69	13.9	13 ^{7/8}	0.255	5 ^{1/16}	16	5.03	5	0.420	7 ^{1/16}	0.820	1 ^{1/8}	3 ^{1/4}	1 ^{15/16}	2 ^{3/4}
x22 ^c	6.49	13.7	13 ^{7/8}	0.230	5 ^{1/16}	16	5.00	5	0.335	5 ^{1/16}	0.735	1 ^{17/16}	3 ^{1/4}	29 ^{4/8}	5 ^{1/2}
W12x336 ^b	98.8	16.8	16 ^{1/8}	1.78	1 ^{3/4}	13	13.4	2 ^{5/16}	2.96	3.55	3 ^{1/8}	1 ^{11/16}	9 ^{1/8}	5 ^{1/2}	
x305 ^b	98.6	16.6	16 ^{1/8}	1.63	1 ^{1/16}	13	13.1	13 ^{1/4}	2.71	2 ^{1/16}	3.30	3 ^{1/8}	1 ^{5/16}		
x279 ^b	81.9	15.9	15 ^{1/8}	1.53	1 ^{1/2}	13	12.4	2.47	2 ^{1/16}	3.07	3 ^{1/8}	1 ^{5/16}			
x230 ^b	74.0	15.4	15 ^{1/8}	1.40	1 ^{3/8}	13	11 ^{1/16}	13.0	2.25	2 ^{1/4}	2.85	3 ^{1/8}	1 ^{1/2}		
x210	67.7	15.1	15	1.29	1 ^{1/16}	11	12 ^{9/16}	2.07	2 ^{1/16}	2.67	2 ^{9/16}	1 ^{1/2}			
x190	55.8	14.7	14 ^{3/4}	1.18	3 ^{1/16}	16	12.8	12 ^{1/4}	1.90	1 ^{1/8}	2.50	2 ^{3/16}	5 ^{1/16}		
x170	50.0	14.0	14	0.960	1 ^{9/16}	16	9.16	12.7	2 ^{5/16}	1.74	1 ^{3/4}	3 ^{1/8}	1 ^{3/8}		
x152	44.7	13.7	13 ^{1/4}	0.870	7 ^{1/16}	16	12.6	12 ^{9/16}	1.56	2 ^{1/16}	2.16	2 ^{7/16}	1 ^{1/16}		
x136	39.9	13.4	13 ^{1/8}	0.790	1 ^{9/16}	16	12.4	12 ^{9/16}	1.25	1 ^{1/4}	2 ^{1/8}	1 ^{1/16}			
x120	35.3	13.1	13 ^{1/8}	0.710	1 ^{11/16}	16	12.3	12 ^{9/16}	1.11	1 ^{1/8}	1.70	2	1 ^{3/16}		
x106	31.2	12.9	12 ^{9/16}	0.610	5 ^{1/16}	16	12.2	12 ^{1/4}	0.990	1	1.58	1 ^{7/16}	1 ^{1/8}		
x96	28.6	12.5	12 ^{9/16}	0.550	9 ^{1/16}	16	12.2	12 ^{1/4}	0.900	1 ^{6/8}	1.50	1 ^{9/16}	1 ^{1/8}		
x87	25.6	12.5	12 ^{9/16}	0.515	1 ^{1/2}	16	12.1	12 ^{9/16}	0.810	1 ^{3/8}	1.41	1 ^{11/16}	1 ^{1/16}		
x79	23.2	12.4	12 ^{9/16}	0.470	1 ^{1/2}	16	12.1	12 ^{9/16}	0.735	1 ^{3/8}	1.33	1 ^{1/16}	1 ^{1/16}		
x72	21.1	12.3	12 ^{9/16}	0.430	7 ^{1/16}	16	12.0	12	0.670	1 ^{1/2}	1.27	1 ^{9/16}	1 ^{1/16}		
x65 ^f	19.1	12.1	12 ^{9/16}	0.390	3 ^{1/16}	16	12.0	12	0.605	5 ^{1/8}	1.20	1 ^{11/16}	1 ^{1/2}		

^b Shape is slender for compression with $F = 50$ ksi.
^c Shape exceeds compact limit for flexure with $F = 50$ ksi.
^d The actual size, combination, and orientation of fastener components should be compared with the geometry of the cross-section to ensure compatibility.
^e Flange thickness greater than 2 in. Special tabular requirements may apply per AISC Specification Section A3.1c.

Table 1-1 (continued)
W Shapes
Properties

T		W14 - W12																
		Compact Section Criteria				Axis X-X				Axis Y-Y		Torsional Properties						
Non- Nominal Inch Wt.	lb/in. ²	b	t	h	t_f	t_w	b	t	I_x	I_y	J	h_o	r	Z	I_x	I_y	J	C_w
132	7.15	17.7		1530	209	6.28	234	548	74.5	3.76	113	12.3	4.23	13.6	12.3	25500		
120	7.30	19.3	1380	190	6.24	212	495	67.5	3.74	102	4.20	13.5	9.37	22700	20200			
109	8.49	21.7	1240	173	6.22	192	447	61.2	3.72	92.7	4.17	13.5	5.37	18000				
99	9.34	23.5	1110	157	6.17	173	402	55.2	3.71	83.6	4.14	13.4	4.06	16000				
90	10.2	25.9	999	143	6.14	157	362	49.9	3.70	75.6	4.11	13.3	4.06	16000				
82	5.92	22.4	881	123	6.05	139	148	29.3	2.48	44.8	2.85	13.5	5.07	6710				
74	6.41	25.4	795	112	6.04	126	134	26.6	2.48	40.5	2.82	13.4	3.87	5980				
68	6.97	27.5	722	103	6.01	115	121	24.2	2.46	36.9	2.80	13.3	3.01	5380				
61	7.75	30.4	640	92.1	5.98	102	107	21.5	2.45	32.8	2.78	13.2	2.19	4710				
53	6.11	30.9	541	77.8	5.89	87.1	57.7	14.3	1.92	22.0	2.22	13.3	1.94	2540				
48	6.75	33.6	484	70.2	5.85	78.4	54.2	12.8	1.91	19.6	2.20	13.2	1.45	2240				
43	7.54	37.4	428	62.6	5.82	69.6	48.2	11.3	1.89	17.3	2.18	13.1	1.05	1950				
38	6.57	39.6	385	61.5	5.87	61.5	26.7	7.88	1.55	12.1	1.82	13.6	0.798	1230				
34	7.41	43.1	340	54.6	5.83	54.6	23.3	6.91	1.53	10.6	1.80	13.5	0.569	1070				
30	8.74	45.4	291	42.0	5.73	47.3	19.6	5.62	1.49	8.99	1.77	13.5	0.380	887				
26	5.98	48.1	245	35.3	5.65	40.2	483	6.41	603	1190	177	3.47	274	4.39	1.27	13.4	0.358	405
22	7.46	53.3	199	29.0	5.54	33.2	7.00	12.7	16.4	481	937	143	3.38	220	3.14	0.208		
279	252	2.89	628	353	6.06	428	321	5.97	386	742	115	3.31	177	12.0	3.34	196	108	35800
230	31.1	7.56	210	33.7	2.07	2420	321	5.89	348	664	104	3.28	159	3.32	120	12.0	31200	
190	3.65	9.16	190	3.65	9.16	1890	263	5.82	311	589	93.0	3.25	143	3.76	12.6	48.8	23600	
170	4.03	10.1	160	2.35	10.1	1430	270	5.66	243	454	728	3.22	126	3.71	12.5	35.6	20100	
152	4.46	11.2	13.0	2.25	12.4	12 ^{9/16}	13.0	5.6	2.85	31/8	1430	209	3.66	12.3	25.8	17200		
136	4.96	12.3	12.4	2.0														

Table 1-1 (continued)
W Shapes
Dimensions

Shape	Area, <i>A</i>	Depth, <i>d</i>	Web Thickness, <i>t_w</i>	Web		Flange		Distance		<i>K</i>	<i>K_{des}</i>	<i>K_t</i>	<i>T</i>	Workable Gage
				<i>t_w</i>	<i>t_w</i>	<i>b</i>	<i>t_f</i>	<i>b</i>	<i>t_f</i>					
W12-58	17.0	12.2	12 ^{1/4}	0.360	3/8	3/16	10.0	10	0.640	5/8	1.24	1 ^{1/2}	15 ^{1/2}	9 ^{1/4}
×53	15.6	12.1	12	0.345	3/8	3/16	10.0	10	0.575	9/16	1.18	1 ^{3/8}	15 ^{1/2}	9 ^{1/4}
W12-50	14.6	12.2	12 ^{1/4}	0.370	3/8	3/16	8.08	8 ^{1/8}	0.640	5/8	1.14	1 ^{1/2}	15 ^{1/2}	9 ^{1/4}
×45	13.1	12.1	12	0.335	5/16	3/16	8.05	8	0.575	9/16	1.08	1 ^{3/8}	15 ^{1/2}	9 ^{1/4}
×40	11.7	11.9	12	0.256	5/16	3/16	8.01	8	0.515	1/2	1.02	1 ^{3/8}	7/8	7/8
W12-35 ^c	10.3	12.5	12 ^{1/2}	0.300	5/16	3/16	6.56	6 ^{1/2}	0.520	1/2	0.820	3 ^{1/8}	3/4	10 ^{1/8}
×30 ^c	8.79	12.3	12 ^{3/4}	0.260	1/4	1/4	6.52	6 ^{1/2}	0.440	7/16	0.740	1 ^{1/2}	3/4	10 ^{1/8}
×28 ^c	7.65	12.2	12 ^{1/4}	0.230	1/4	1/8	6.49	6 ^{1/2}	0.380	3/8	0.680	1 ^{1/2}	3/4	10 ^{1/8}
W12-22 ^c	6.48	12.3	12 ^{1/4}	0.260	1/4	1/8	4.03	4	0.325	7/16	0.725	1 ^{5/16}	5/8	10 ^{3/8}
×19 ^c	5.57	12.2	12 ^{1/2}	0.235	1/4	1/8	4.01	4	0.350	3/8	0.650	1 ^{5/16}	5/8	10 ^{3/8}
×16 ^c	4.71	12.0	12	0.220	1/4	1/8	3.99	4	0.365	1/4	0.612	1 ^{5/16}	5/8	10 ^{3/8}
×14 ^c	4.16	11.9	11 ^{7/8}	0.200	3/16	3/16	3.97	4	0.225	1/4	0.525	1/4	9/16	10 ^{3/8}
W10-112	32.9	11.4	11 ^{3/4}	0.755	3/4	3/8	10.4	10 ^{3/8}	1.25	1/4	1.75	1 ^{5/16}	1	7 ^{1/2}
×100	29.4	11.1	11 ^{1/8}	0.680	1 ^{1/8}	3/8	10.3	10 ^{8/16}	1.12	1/8	1.62	1 ^{3/16}	1	5 ^{1/2}
×88	25.9	10.8	10 ^{7/8}	0.605	9/16	5/16	10.3	10 ^{4/8}	0.990	1	1.49	1 ^{11/16}	15 ^{1/16}	9 ^{1/8}
×77	22.6	10.6	10 ^{5/8}	0.530	1/2	1/8	10.2	10 ^{4/8}	0.870	7/8	1.37	1 ^{9/16}	15 ^{1/16}	9 ^{1/8}
×68	20.0	10.4	10 ^{3/8}	0.470	1/2	1/4	10.1	10 ^{6/8}	0.770	3/4	1.27	1 ^{7/16}	7/8	10 ^{1/8}
×60	17.6	10.2	10 ^{1/4}	0.420	1/4	1/4	10.1	10 ^{6/8}	0.680	11 ^{1/16}	1.18	1 ^{3/8}	13 ^{1/16}	10 ^{1/8}
×54	15.8	10.1	10 ^{7/8}	0.370	3/16	3/16	10.0	10	0.610	5/8	1.12	1 ^{5/16}	13 ^{1/16}	10 ^{1/8}
×49	14.4	10.0	10	0.340	3/16	3/16	10.0	10	0.560	9/16	1.06	1 ^{1/4}	13 ^{1/16}	10 ^{1/8}
W10-45	13.3	10.1	10 ^{1/8}	0.350	3/8	3/16	8.02	8	0.620	5/8	1.12	1 ^{5/16}	13 ^{1/16}	7 ^{1/2}
×39	11.5	9.92	9 ^{7/8}	0.315	5/16	3/16	7.99	8	0.530	1/2	1.03	1 ^{3/8}	13 ^{1/16}	7 ^{1/2}
×33	9.71	9.73	9 ^{9/16}	0.290	9/16	3/16	7.96	8	0.435	7/16	0.835	1 ^{1/2}	3/4	8 ^{3/8}
W10-30	8.84	10.5	10 ^{1/2}	0.300	5/16	3/16	5.81	5 ^{1/4}	0.510	1/2	0.810	1 ^{1/8}	1 ^{1/16}	2 ^{9/16}
×26	7.61	10.3	10 ^{3/8}	0.260	1/4	1/8	5.77	5 ^{1/4}	0.440	1/2	0.740	1 ^{1/16}	15 ^{1/16}	2 ^{9/16}
×22 ^c	6.49	10.2	10 ^{1/8}	0.240	1/4	1/8	5.75	5 ^{1/4}	0.360	3/8	0.660	1 ^{1/16}	15 ^{1/16}	2 ^{9/16}
W10-19	5.62	10.2	10 ^{1/4}	0.250	1/4	1/8	4.02	4	0.395	3/8	0.695	1 ^{1/16}	5/8	8 ^{3/8}
×17 ^c	4.99	10.1	10 ^{1/8}	0.240	1/4	1/8	4.01	4	0.330	5/16	0.630	1 ^{1/16}	5/8	8 ^{3/8}
×15 ^c	4.41	10.0	10	0.230	1/4	1/8	4.00	4	0.270	1/4	0.570	1 ^{1/16}	5/8	8 ^{3/8}
×12 ^c	3.54	9.87	9 ^{9/16}	0.190	3/16	3/16	3.96	4	0.210	3/16	0.510	1/4	5/8	8 ^{3/8}


^c Shape is slender for compression with $F_c = 50$ ksi.
^f Shape exceeds compact limit for flexure with $F_f = 50$ ksi.
^g The actual size, combination, and orientation of fastener components should be compared with the geometry of the cross-section to ensure compatibility.
^h Shape does not meet the M/W limit for shear in Specification Section G2-1 with $F_y = 50$ ksi.

T
W Shapes
Properties

Table 1-1 (continued)
W Shapes
Properties

Non- Compact Section Criteria	Axis X-X			Axis Y-Y			Torsional Properties			J	<i>C_w</i>
	<i>b</i>	<i>t</i>	<i>h</i>	<i>I</i>	<i>S</i>	<i>r</i>	<i>I</i>	<i>S</i>	<i>r</i>		
W12-W10	24	4	107	21.4	2.51	11.6	32.5	2.82	11.6	2.10	3570
	24	4	425	70.6	5.23	77.9	95.6	19.2	4.48	29.1	279
	24	4	45	7.00	2.96	348	57.7	5.15	64.2	12.4	15.8
	24	4	40	7.77	3.36	307	51.5	5.13	44.1	11.0	14.0
	24	4	35	6.31	3.62	285	45.6	5.25	51.2	14.5	17.4
	24	4	30	7.41	4.18	238	38.6	5.21	43.1	20.3	24.7
	24	4	26	8.54	4.72	204	33.4	5.17	37.2	17.3	30.0
	24	4	22	4.74	4.18	156	25.4	4.91	29.3	23.1	29.3
	24	4	19	5.72	4.6	130	21.3	4.82	24.7	18.8	22.6
	24	4	16	7.53	4.94	103	17.1	4.67	20.1	14.1	17.7
	24	4	14	8.82	5.43	86.6	14.9	4.62	17.4	11.9	13.6
	24	4	10	10.62	6.16	623	112	4.60	130	20.7	24.0
	24	4	8	5.19	5.00	534	55.4	4.54	113	34.8	4330
	24	4	7	5.86	4.8	455	85.9	4.49	97.6	15.4	31.0
	24	4	6	6.58	16.7	394	75.7	4.44	85.3	134	35.6
	24	4	60	7.41	18.7	341	66.7	4.39	116	23.0	2640
	24	4	54	8.15	21.2	303	60.0	4.37	66.6	10.6	2320
	24	4	49	8.83	23.1	272	54.6	4.35	60.4	9.4	2070
	24	4	45	6.47	22.5	248	49.1	4.32	54.9	13.3	203
	24	4	39	7.53	25.0	209	42.1	4.27	50.0	11.4	392
	24	4	33	9.15	27.1	171	35.0	4.19	38.8	11.4	275
	24	4	30	5.70	29.5	170	32.4	4.38	36.6	16.7	345
	24	4	26	6.56	34.0	144	27.9	4.35	31.3	14.1	20.0
	24	4	22	7.90	36.9	118	23.2	4.27	26.0	11.4	17.2
	24	4	19	5.09	35.4	96.3	18.8	4.14	21.6	12.2	19.3
	24	4	17	6.08	36.9	81.9	16.2	4.05	18.7	10.4	17.8
	24	4	15	7.41	38.5	68.9	13.8	3.95	16.0	8.9	16.5
	24	4	12	9.43	46.6	53.8	10.9	3.90	12.6	2.18	50.9

Table 1-1 (continued)
W Shapes Dimensions



Shape	Area, A	Depth, d	Thickness, t_w	$\frac{t_w}{2}$	Web		Flange		Distance				
					in. ²	in.	in.	in.	Thickness, t_f	in.	k_{des}	k_{des}	Workable Gage
W8×67	19.7	9.00	9/16	5/16	9.0570	9/16	8.28	8/14	0.935	15/16	1.33	15/16	53/4
W8×58	17.1	8.75	83/16	0.510	11/16	8.22	8/14	0.810	13/16	1.20	1 1/2	7/8	5 1/2
W8×48	14.1	8.50	81/16	0.400	3/8	8/16	8.11	8/16	0.685	11/16	1.08	1 3/8	13/16
W8×40	11.7	8.25	87/16	0.350	3/8	3/16	8.07	8/16	0.560	9/16	0.954	1 1/4	13/16
W8×35	10.3	8.12	81/8	0.310	5/16	3/16	8.02	8/16	0.495	7/16	0.889	1 3/16	13/16
W8×31 ¹	9.12	8.00	8	0.285	5/16	9/16	8.00	8	0.435	7/16	0.829	1 3/16	9/16
W8×28	8.24	8.06	8	0.285	5/16	9/16	6.54	63/16	0.465	7/16	0.859	15/16	5/16
W8×24	7.08	7.93	77/8	0.245	11/16	6.50	61/16	0.400	3/8	0.794	7/8	9/16	63/16
W8×21	6.16	8.28	81/16	0.250	11/16	5.27	51/4	0.400	3/8	0.700	7/8	9/16	61/2
W8×18	5.26	8.14	81/8	0.230	11/16	5.25	57/16	0.330	5/16	0.630	13/16	9/16	61/2
W8×15	4.44	8.11	81/16	0.245	11/16	4.02	4	0.315	51/16	0.615	13/16	9/16	61/2
W8×13 ¹	3.84	7.99	8	0.230	11/16	4.00	4	0.255	51/16	0.555	13/16	9/16	61/2
W8×10 ¹	2.96	7.89	77/8	0.170	31/16	3.94	4	0.205	31/16	0.505	11/16	1/2	4
W6×25	7.34	6.38	63/8	0.320	5/16	3/16	6.08	63/8	0.455	7/16	0.705	13/16	9/16
W6×20	5.87	6.20	61/4	0.260	11/16	1/8	6.02	6	0.365	3/8	0.615	7/8	9/16
W6×15 ¹	4.43	5.99	6	0.230	11/16	5.99	6	0.260	1/4	0.510	3/4	9/16	4 1/2
W6×16	4.74	6.28	61/4	0.260	11/16	1/8	4.03	4	0.405	3/8	0.655	7/8	9/16
W6×12 ¹	3.55	6.03	6	0.230	11/16	1/8	4.00	4	0.280	1/4	0.530	3/4	9/16
W6×9 ¹	2.68	5.90	57/8	0.170	31/16	3/8	3.94	4	0.215	31/16	0.465	11/16	1/2
W6×8.5 ¹	2.52	5.83	57/8	0.170	31/16	3/8	3.94	4	0.195	31/16	0.445	11/16	1/2
W5×19	5.56	5.15	51/8	0.270	11/16	1/8	5.03	5	0.430	7/16	0.730	13/16	7/16
W5×16	4.71	5.01	5	0.240	11/16	1/8	5.00	5	0.360	3/8	0.660	9/16	3 3/8
W4×13	3.83	4.16	43/8	0.280	11/16	1/8	4.06	4	0.345	3/8	0.595	3/4	2 5/8

- Shape is slender for compression with $\gamma = 50$ ksi.
- Shape exceeds compact limit for flexure with $\gamma = 50$ ksi.
- The actual size, combination, and orientation of fastener components should be compared with the geometry of the cross-section to ensure compatibility.

Table 1-1 (continued)
W Shapes Properties



W Shapes Properties														
Nominal Wt.	Compact Section Criteria			Axis X-X			Axis Y-Y			Torsional Properties				
	b_t	h	t_b	I	S	r	Z	I	S	r	I_b	h_b	J	C_w
67	4.43	11.1	272	60.4	372	70.1	88.6	21.4	21.2	32.7	2.43	8.07	5.05	1440
58	5.07	12.4	228	52.0	365	59.8	75.1	18.3	21.0	27.9	7.94	3.33	1180	931
48	5.92	15.9	184	43.2	49.0	60.9	60.9	15.0	20.8	22.9	7.35	7.82	1.96	726
40	7.21	17.6	146	35.5	353	39.8	49.1	12.2	20.4	18.5	2.31	7.69	1.12	726
35	8.10	20.5	127	31.2	35.1	34.7	42.6	10.6	20.8	16.1	2.28	7.63	0.789	619
31	9.19	22.3	110	27.5	34.7	30.4	37.1	9.27	20.2	14.1	2.26	7.57	0.536	530
28	7.03	22.3	98.0	24.3	345	27.2	21.7	6.63	1.62	10.1	1.84	7.60	0.537	312
24	8.12	25.9	82.7	20.9	342	23.1	18.3	5.63	1.61	8.57	1.82	7.53	0.346	259
21	6.59	27.5	75.3	18.2	349	20.4	9.77	3.71	1.26	5.69	1.46	7.88	0.282	152
18	7.95	29.9	61.9	15.2	343	17.0	7.97	3.04	1.23	4.66	1.43	7.81	0.172	122
15	6.37	28.1	48.0	11.8	32.9	13.6	3.41	1.70	0.876	2.67	1.06	7.80	0.137	51.8
13	7.84	29.9	39.6	9.91	32.1	11.4	2.73	1.37	0.843	2.15	1.03	7.74	0.0871	40.8
10	9.61	40.5	30.8	7.81	32.2	8.87	2.09	1.06	0.841	1.66	1.01	7.69	0.0426	30.9
25	6.68	15.5	53.4	16.7	27.0	18.9	17.1	5.61	1.52	8.56	1.74	5.93	0.461	150
20	8.25	19.1	41.4	13.4	26.6	14.9	13.3	4.41	1.50	6.72	1.70	5.84	0.240	113
15	11.5	21.6	29.1	9.72	25.6	10.8	9.32	3.11	1.45	4.75	1.66	5.73	0.101	76.5
16	4.98	19.1	32.1	10.2	26.0	11.7	4.43	2.20	0.967	3.39	1.13	5.88	0.223	38.2
12	7.14	21.6	22.1	7.31	24.9	8.30	2.99	1.50	0.918	2.32	1.08	5.75	0.0903	24.7
9	9.16	29.2	16.4	5.56	24.7	6.23	2.20	1.11	0.905	1.72	1.06	5.69	0.0405	17.7
8.5	10.1	29.1	14.9	5.10	24.3	5.73	1.99	1.01	0.890	1.56	1.05	5.64	0.0333	15.8
19	5.85	13.7	26.3	10.2	21.7	11.6	9.13	3.63	1.28	5.53	1.45	4.72	0.316	50.9
16	6.94	15.4	21.4	8.55	21.3	9.63	7.51	3.00	1.26	4.58	1.43	4.65	0.192	40.6
13	5.88	10.6	11.3	5.46	1.72	6.28	3.86	1.90	1.00	2.92	1.16	3.82	0.151	14.0

Structural Steel Sections according to AISC (SI units).

Table 17-1
SI Equivalents of Standard U.S.
Shape Profiles
W Shapes

Shape	SI Equivalent	Shape	SI Equivalent	Shape	SI Equivalent
in. × lb/ft	mm × kg/m	in. × lb/ft	mm × kg/m	in. × lb/ft	mm × kg/m
W44×335	W1100×499	W36×256	W920×381	W27×539	W690×802
×290	×433	×232	×345	×368	×548
×262	×390	×210	×313	×336	×500
×230	×343	×194	×289	×307	×457
W40×593	W1000×883	×182	×271	×281	×419
×503	×748	×170	×253	×258	×384
×431	×642	×160	×238	×235	×350
×397	×591	×150	×223	×217	×323
×372	×554	×135	×201	×194	×289
×362	×539	W33×387	W840×576	×178	×265
×324	×483	×354	×527	×161	×240
×297	×443	×318	×473	×146	×217
×277	×412	×291	×433	W27×129	W690×192
×249	×371	×263	×392	×114	×170
×215	×321	×241	×359	×102	×152
×199	×296	×221	×329	×94	×140
W40×392	W1000×584	×201	×299	×84	×125
×331	×494	W33×169	W840×251	W24×370	W610×551
×327	×486	×152	×226	×335	×498
×294	×438	×141	×210	×306	×455
×278	×415	×130	×193	×279	×415
×264	×393	×118	×176	×250	×372
×235	×350	W30×391	W760×582	×229	×341
×211	×314	×357	×531	×207	×307
×183	×272	×326	×484	×192	×285
×167	×249	×292	×434	×176	×262
×149	×222	×261	×389	×162	×241
W36×800	W920×1191	×235	×350	×146	×217
×652	×970	×211	×314	×131	×195
×529	×787	×191	×284	×117	×174
×487	×725	×173	×257	×104	×155
×441	×656	W30×148	W760×220	W24×103	W610×153
×395	×588	×132	×196	×94	×140
×361	×537	×124	×185	×84	×125
×330	×491	×116	×173	×76	×113
×302	×449	×108	×161	×68	×101
×282	×420	×99	×147	W24×62	W610×92
×262	×390	×90	×134	×55	×82
×247	×368				
×231	×345				

AMERICAN INSTITUTE OF STEEL CONSTRUCTION, INC.

Table 17-1 (continued)
SI Equivalents of Standard U.S.
Shape Profiles

W Shapes

Shape	SI Equivalent	Shape	SI Equivalent	Shape	SI Equivalent
in. × lb/ft	mm × kg/m	in. × lb/ft	mm × kg/m	in. × lb/ft	mm × kg/m
W21×201	W530×300	W16×100	W410×149	W14×53	W360×79
×182	×272	×89	×132	×48	×72
×166	×248	×77	×114	×43	×64
×147	×219	×67	×100	W14×38	W360×58
×132	×196	W16×57	W410×85	×34	×51
×122	×182	×50	×75	×30	×44.6
×111	×165	×45	×67	W14×26	W360×39
×101	×150	×40	×60	×22	×32.9
W21×93	W530×138	×36	×53	W12×336	W310×500
×83	×123	W16×31	W410×46.1	×305	×454
×73	×109	×26	×38.8	×279	×415
×68	×101	W14×730	W360×1086	×252	×375
×62	×92	×665	×990	×230	×342
×55	×82	×605	×900	×210	×313
×48	×72	×550	×818	×190	×283
W21×57	W530×85	×500	×744	×170	×253
×50	×74	×455	×677	×152	×226
×44	×66	×426	×634	×136	×202
W18×311	W460×464	×398	×592	×120	×179
×283	×421	×370	×551	×106	×158
×258	×384	×342	×509	×96	×143
×234	×349	×311	×463	×87	×129
×211	×315	×283	×421	×79	×117
×192	×286	×257	×382	×72	×107
×175	×260	×233	×347	×65	×97
×158	×235	×211	×314	W12×58	W310×86
×143	×213	×193	×287	×53	×79
×130	×193	×176	×262	W12×50	W310×74
×119	×177	×159	×237	×45	×67
×106	×158	×145	×216	×40	×60
×97	×144	W14×132	W360×196	W12×35	W310×52
×86	×128	×120	×179	×30	×44.5
×76	×113	×109	×162	W12×22	W310×32.7
W18×71	W460×106	×99	×147	×19	×28.3
×65	×97	×90	×134	×16	×23.8
×60	×89	W14×82	W360×122	×14	×21.0
×55	×82	×74	×110		
×50	×74	×68	×101		
W18×46	W460×68	×61	×91		
×40	×60				
×35	×52				

AMERICAN INSTITUTE OF STEEL CONSTRUCTION, INC.

Table 17-1 (continued)
SI Equivalents of Standard U.S.
Shape Profiles
W Shapes

Shape in. × lb/ft	SI Equivalent mm × kg/m	Shape in. × lb/ft	SI Equivalent mm × kg/m	Shape in. × lb/ft	SI Equivalent mm × kg/m
W10×112 ×100 ×88 ×77 ×68 ×60 ×54 ×49	W250×167 ×149 ×131 ×115 ×101 ×89 ×80 ×73	W10×19 ×17 ×15 ×12 W8×67 ×58 ×48 ×40	W250×28.4 ×25.3 ×22.3 ×17.9 W200×100 ×86 ×71 ×59	W8×15 ×13 ×10 W6×25 ×20 ×15 W6×16 ×12 ×9 ×8.5	W200×22.5 ×19.3 ×15.0 W150×37.1 ×29.8 ×22.5 W150×24.0 ×18.0 ×13.5 ×13.0
W10×45 ×39 ×33	W250×67 ×58 ×49.1	W8×28 ×35 ×31	W200×41.7 ×52 ×46.1	W5×19 ×16	W130×28.1 ×23.8
W10×30 ×26 ×22	W250×44.8 ×38.5 ×32.7	W8×21 ×24 ×18	W200×31.3 ×35.9 ×26.6	W4×13	W100×19.3

AMERICAN INSTITUTE OF STEEL CONSTRUCTION, INC.